


LIGHT EMITTING DIODES 1.6÷4.6 μm

Model LED46-PR 4.6 mm 6 mW

•Light Emitting Diodes **LED46-PR** are designed for emitting at a spectral range around 4600 nm. Heterostructures (HS) are grown on InAs substrates. The output emission can be modulated by current flowing in a forward direction.


•Light Emitting Diodes **LED46-PR** are developed for using in optical gas sensors and medical diagnostics. They have stable output power and lifetime more then 10000 hours.

•Related products: Our standard **LED Driver** provides power supply of **LED46-PR** in two recommended here regimes (Quasi-CW and Pulsed).

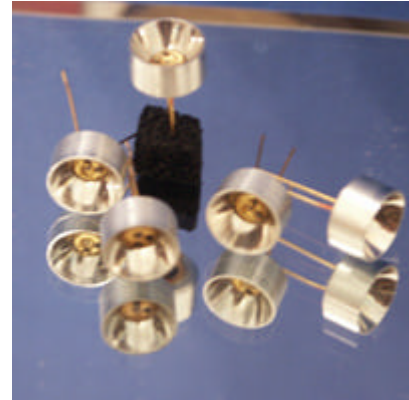

Parameters	Min	Typ	Max
Wavelength, μm	4.40	4.50	4.60
FWHM, μm	1.00	1.10	1.20
Optical Power, μW			
Quasi-CW @ 200 mA	4	6	8
Pulsed@1A	100	120	140
Switching Time, ns	10	30	50
Operating Temperature Range, °C	-240÷+50		
Emitting Area, μm	300x300		
Soldering temperature	260 °C		
Package	TO-18 with Parabolic Reflector		

Recommended regimes of operation

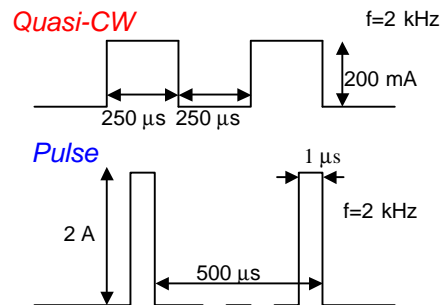

Package TO-18 with Reflector

