



Variable-Gain Photoreceiver - Fast Optical Power Meter

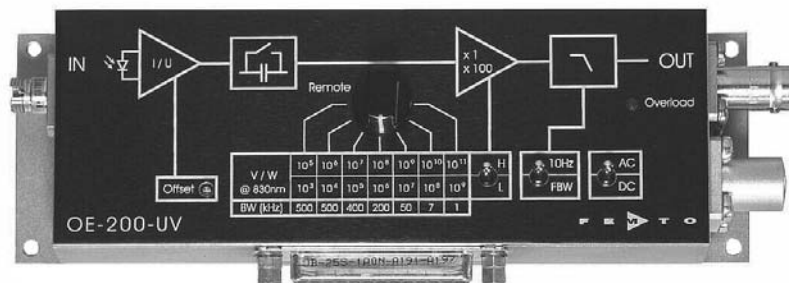

Features	<ul style="list-style-type: none"> • Si Detector with 1.1 x 1.1 mm² Active Area in FC, ST or SMA Fiber Receptacle • Spectral Range 190 - 1000 nm, UV-Enhanced • Conversion Gain Switchable from 1 x 10³ to 1 x 10¹¹ V/W • Calibrated at 830 nm, Traceable to NIST Standards • Bandwidth up to 500 kHz • Local and Remote Control
----------	---


Applications	<ul style="list-style-type: none"> • Fast Optical Power Meter • Spectroscopy • General-Purpose Opto-Electrical Measurements • Optical Receiver for Use with Lock-In Amplifiers
--------------	--

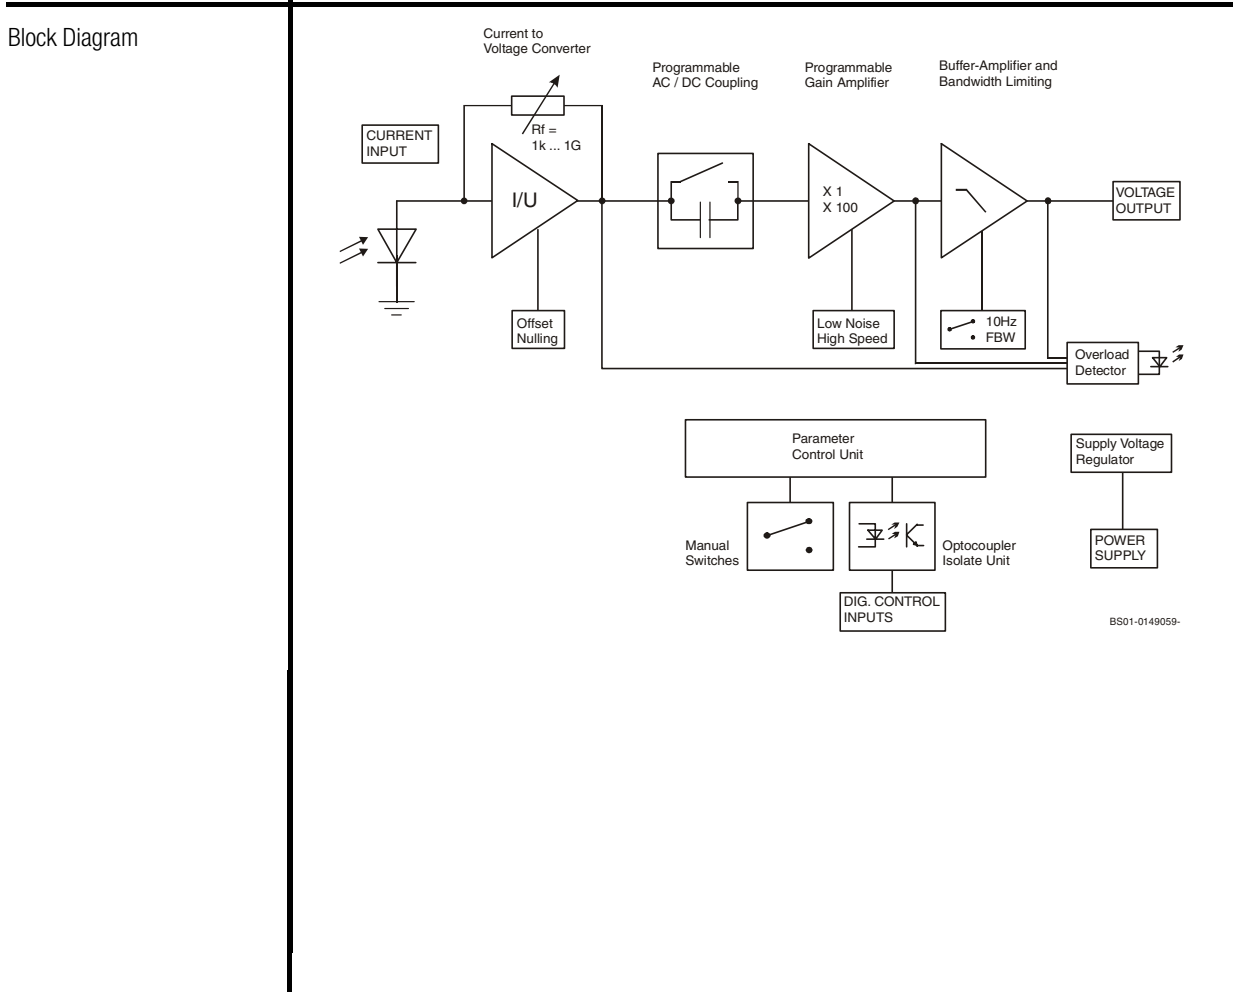

Variable-Gain Photoreceiver - Fast Optical Power Meter

Specifications	<i>Test Conditions</i>	<i>V_s = ± 15 V, T_a = 25°C</i>						
Gain	Conversion Gain	1 x 10 ³ ... 1 x 10 ¹¹ V/W (@ 830 nm)						
	Gain Accuracy	± 5 % electro-optical (P _{opt} ≤ 1 mW), traceable to NIST						
	Gain Drift	see table below						
Frequency Response	Lower Cut-Off Frequency	DC / 1 Hz, switchable						
	Upper Cut-Off Frequency	up to 500 kHz (see table below), switchable to 10 Hz						
	Gain Flatness	± 0.1 dB						
	Gain Accuracy	± 1 % electrical, between settings						
Input	Noise Equivalent Power (NEP)	see table below						
	Max. CW Saturation Power	see table below						
	Dark Current Compensation	± 2 nW, adjustable by offset trimpot and external control voltage						
Detector	Detector	Si photodiode in FC, ST or SMA fiber receptacle						
	Active Area	1.1 x 1.1 mm ²						
	Spectral Response	190 – 1000 nm, UV-enhanced						
	Sensitivity	0.3 A/W (@ 830 nm) 0.1 A/W (@ 200 nm)						
	Dark Current	2 pA typ.						
Performance Depending on Gain Setting	Gain Setting (Low Noise) (V/W)	10 ³	10 ⁴	10 ⁵	10 ⁶	10 ⁷	10 ⁸	10 ⁹
	Upper Cut-Off Frequency (- 3 dB)	500 kHz	500 kHz	400 kHz	200 kHz	50 kHz	7 kHz	1.2 kHz
	Rise / Fall Time (10% - 90%)	700 ns	700 ns	900 ns	1.8 μs	7 μs	50 μs	300 μs
	NEP (√Hz, @ 500 Hz, 830 nm)	69 pW	7.9 pW	1.6 pW	450 fW	150 fW	48 fW	17 fW
	Offset Current Drift (°C)	100 nW	10 nW	1 nW	85 pW	8.5 pW	1.3 pW	1 pW
	Gain Drift (°C)	0.008%	0.008%	0.008%	0.01%	0.01%	0.01%	0.02%
	CW Saturation Power	2 mW	1 mW	0.1 mW	10 μW	1 μW	0.1 μW	10 nW
	Gain Setting (High Speed) (V/W)	10 ⁵	10 ⁶	10 ⁷	10 ⁸	10 ⁹	10 ¹⁰	10 ¹¹
	Upper Cut-Off Frequency (- 3 dB)	500 kHz	500 kHz	400 kHz	200 kHz	50 kHz	7 kHz	1.2 kHz
	Rise / Fall Time (10% - 90%)	700 ns	700 ns	900 ns	1.8 μs	7 μs	50 μs	300 μs
	NEP (√Hz, @ 500 Hz, 830 nm)	45 pW	6.2 pW	1.5 pW	450 fW	150 fW	48 fW	17 fW
	Offset Current Drift (°C)	100 nW	10 nW	1 nW	85 pW	8.5 pW	1.3 pW	1 pW
	Gain Drift (°C)	0.008%	0.008%	0.008%	0.01%	0.01%	0.01%	0.02%
	CW Saturation Power	0.1 mW	10 μW	1 μW	0.1 μW	10 nW	1 nW	0.1 nW
	Output	Output Voltage	± 10 V (@ > 10 kΩ load)					
Output Impedance		50 Ω (terminate with > 10 kΩ load for best performance)						
Max. Output Current		± 30 mA						
Indicator LED	Function	overload						
Digital Control	Control Input Voltage Range	low bit: - 0.8 ... + 1.2 V, high bit: 2.3 ... + 12 V						
	Control Input Current	0 mA @ 0 V, 1.5 mA @ + 5 V, 4.5 mA @ + 12 V						
	Overload Output	non active: 0 V , max. -1 mA, active: 5.1 V, max. 7 mA						
Ext. Offset Control	Control Voltage Range	± 10 V						
	Offset Control Input Impedance	20 kΩ						

Variable-Gain Photoreceiver - Fast Optical Power Meter

Specifications (continued)	<p>Power Supply</p> <p>Supply Voltage $\pm 15\text{ V}$ Supply Current $+ 110 / - 80\text{ mA}$ (depends on operating conditions, recommended power supply capability minimum $\pm 200\text{ mA}$) Stabilized Power Supply Output $\pm 12\text{ V}$, max. 150 mA, $+ 5\text{ V}$, max. 50 mA</p> <p>Case</p> <p>Weight 320 g (0.74 lbs) Material AlMg4.5Mn, nickel-plated</p> <p>Temperature Range</p> <p>Storage Temperature $- 40 \dots + 80\text{ }^\circ\text{C}$ Operating Temperature $0 \dots + 60\text{ }^\circ\text{C}$</p>	
Absolute Maximum Ratings	<p>Max. cw-Power (averaged) 20 mW Control Input Voltage $- 5\text{ V} / + 16\text{ V}$ Power Supply Voltage $\pm 22\text{ V}$</p>	
Connectors	<p>Input optical, FC, ST or SMA fiber receptacle</p> <p>Output BNC</p> <p>Power Supply</p> <p>LEMO series 1S, 3-pin fixed socket Pin 1: $+ 15\text{ V}$ Pin 2: $- 15\text{ V}$ Pin 3: GND</p> <div style="text-align: center;">  </div> <p>Control Port</p> <p>Sub-D 25-pin, female, qual. class 2 Pin 1: $+ 12\text{ V}$ (stabilized power supply output) Pin 2: $- 12\text{ V}$ (stabilized power supply output) Pin 3: AGND (analog ground) Pin 4: $+ 5\text{ V}$ (stabilized power supply output) Pin 5: digital output: high = overload Pin 6: signal output (connected to BNC) Pin 7: NC Pin 8: input offset control voltage Pin 9: DGND (ground for digital control pins 10 - 14) Pin 10: digital control input: gain, LSB Pin 11: digital control input: gain Pin 12: digital control input: gain, MSB Pin 13: digital control input: AC/DC Pin 14: digital control input: high speed / low noise Pin 15 - 25: NC</p>	
Available Models	<p>OE-200-UV-FC FC receptacle, calibrated at 830 nm OE-200-UV-ST ST receptacle, calibrated at 830 nm OE-200-UV-SMA SMA receptacle, calibrated at 830 nm</p>	

Variable-Gain Photoreceiver - Fast Optical Power Meter

Remote Control Operation

General

Remote control input bits are opto-isolated and connected by a logical OR function to the local switch settings. For remote control set the corresponding local switches to "Remote", "AC" and "H" and select the desired setting via a bit code at the corresponding digital inputs. Mixed operation, e.g. local AC/DC setting and remote controlled gain setting, is also possible.

The switch setting "FBW / 10 Hz" of the low pass signal filter is not remote controllable.


Gain Setting

Low Noise Gain (V/W) Pin 14=high	High Speed Gain (V/W) Pin 14=low	Pin 12 MSB	Pin 11	Pin 10 LSB
10^3	10^5	low	low	low
10^4	10^6	low	low	high
10^5	10^7	low	high	low
10^6	10^8	low	high	high
10^7	10^9	high	low	low
10^8	10^{10}	high	low	high
10^9	10^{11}	high	high	low

AC/DC Setting


Coupling	Pin 13
AC	low
DC	high

Spectral Response

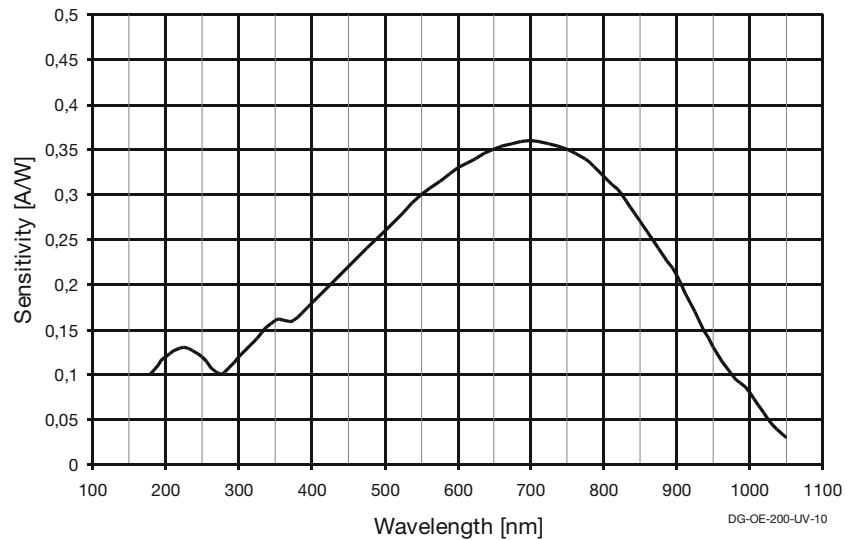

Variable-Gain Photoreceiver - Fast Optical Power Meter

Dimensions

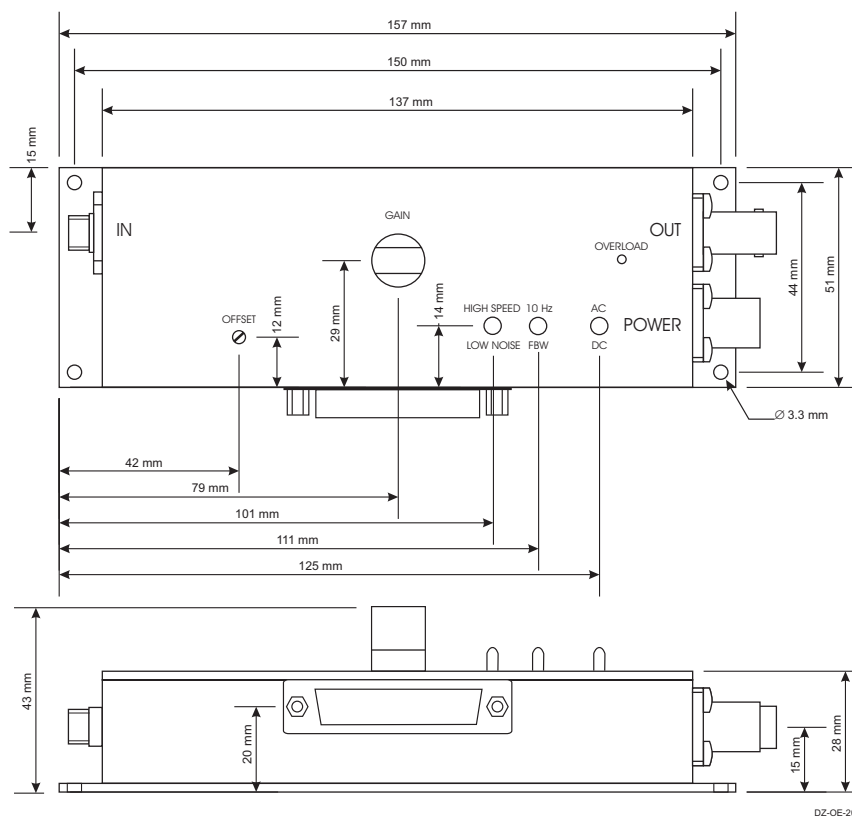

DZ-OE-200-11

FEMTO Messtechnik GmbH
Paul-Lincke-Ufer 34
D-10999 Berlin · Germany
Tel.: +49 (0)30 – 4 46 93 86
Fax: +49 (0)30 – 4 46 93 88
e-mail: info@femto.de
http://www.femto.de

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.
© by FEMTO Messtechnik GmbH
Printed in Germany