

# UV - Photodetector with integrated amplifier

**JIC 127 B**  
**JIC 128 B**  
**JIC 129 B**



- characteristics :**
- ◆ integrated UV-B filter
  - ◆ spectral range 280 ... 325 nm
  - ◆ active area 0,055 mm<sup>2</sup>
  - ◆ responsivity, decadic staggering 0,4/4/40 mV/nW
  - ◆ extra sensor pin for external adjustment of gain and bandwidth
  - ◆ single supply voltage
  - ◆ sensor assembly isolated to ground
  - ◆ hermetically welded TO5-metal/glass package
  - ◆ components are in conformity with RoHS and WEEE

- applications :**
- ◆ selective UV-measurement
  - ◆ control of UV-B part of UV-lamps
  - ◆ control of irradiancy in varnish and adhesive hardening

## absolute maximum ratings:

supply voltage	+5,5	V
working temperature range	-25 °C ... +85	°C
storage temperature range	-40 °C ... +100	°C
welding temperature (5s)	300	°C

## technical data :

common test conditions, as not otherwise specified:  $T_A = 25\text{ °C}$ ,  $V_S = +5\text{ V}$   
typ. values, maximum values in brackets

parameters	test condition	JIC127B	JIC128B	JIC129B	unit
feedback resistor		10	100	1.000	MΩ
dark offset voltage	$E = 0\text{ lx}$	$\pm 1$	$\pm 2$	$\pm 3$	mV
noise voltage	$B = 1\text{ kHz}$	1			mV <sub>rms</sub>
max. spectral responsivity	$\lambda = 315\text{ nm}$	0,4	4	40	mV/nW
risetime		20	100	700	μs
bandwidth	- 3 dB	15	3	0,5	kHz
saturation voltage	$R_L = 2\text{ k}\Omega$	+ 4,95 (+ 4,8)			V
short current		$\pm 50$			mA
supply voltage		+ 2,7...+ 5			V
current consumption		750 (1100)			μA

rev2 (03/2009)


For more information:

Electro Optical Components, 5460 Skyline Blvd., Santa Rosa, CA 95403  
Phone: (707) 568-1642 | Fax: (707) 568-1652 | Email: info@eoc-inc.com


DATA SHEET

# JIC 127 B, 128 B, 129 B

## relative spectral responsivity

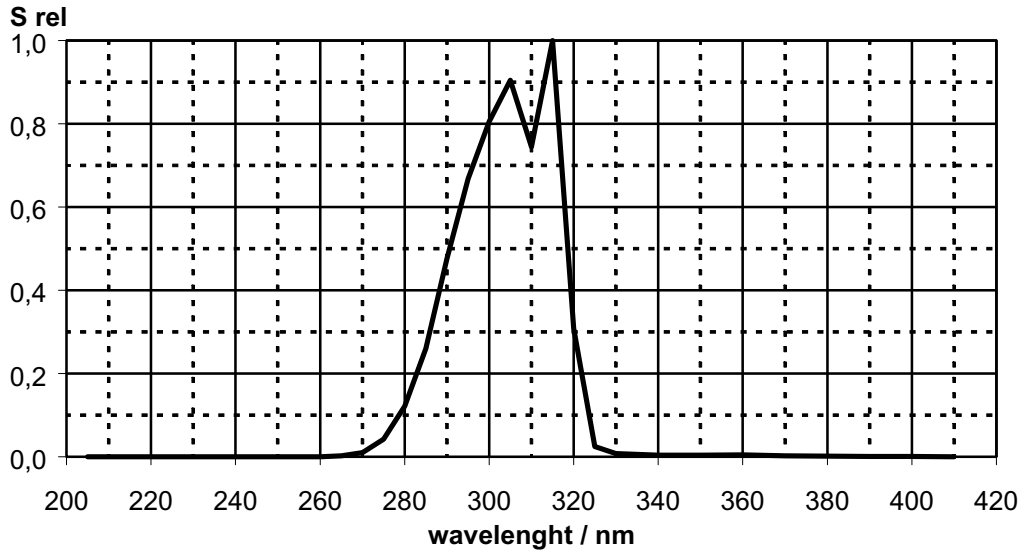


## pin configuration

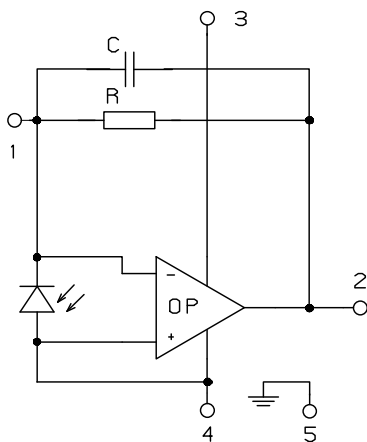

- 1  $R_f$
- 2 Out
- 3  $V_s$
- 4 GND
- 5 Case

## package dimensions

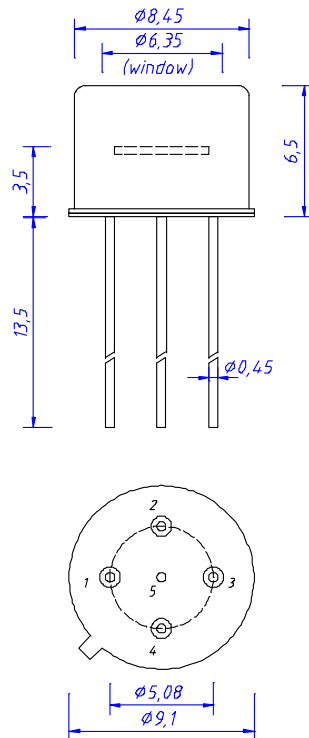

## application hints:

- If an external resistor for reduction of gain is used, please make sure that length of connectors is as short as possible to reduce noise and capacitive interference.
- If internally adjusted gain is used only, please cut pin „1“.