




Datasheet

HBPR-100M-60K-SI-FC

High-Speed Balanced Photoreceiver

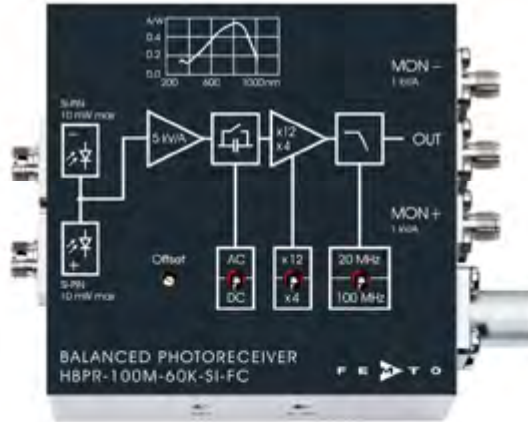


Features

- Bandwidth DC to 100 MHz
- Common-Mode Rejection Ratio (CMRR) 50 dB typ.
- Si-PIN photodiodes
- FC fiber optic inputs
- Spectral range 320 – 1000 nm
- Very low NEP, down to 6.5 pW/√Hz
- Transimpedance gain switchable 20×10^3 V/A, 60×10^3 V/A
- High dynamic input range up to 2×10 mW balanced optical power
- Fast monitor outputs with 10 MHz bandwidth and 1×10^3 V/A gain
- Switchable low pass filter for minimizing wideband noise
- UNC 8-32 and M4 tapped holes for mounting on standard posts with metric and imperial thread

Applications

- Spectroscopy
- Heterodyne detection
- Optical coherence tomography (OCT)
- Optical delay measurement
- Differential optical front-end for oscilloscopes, spectrum analyzers, A/D converters and RF lock-in amplifiers

Block Diagram

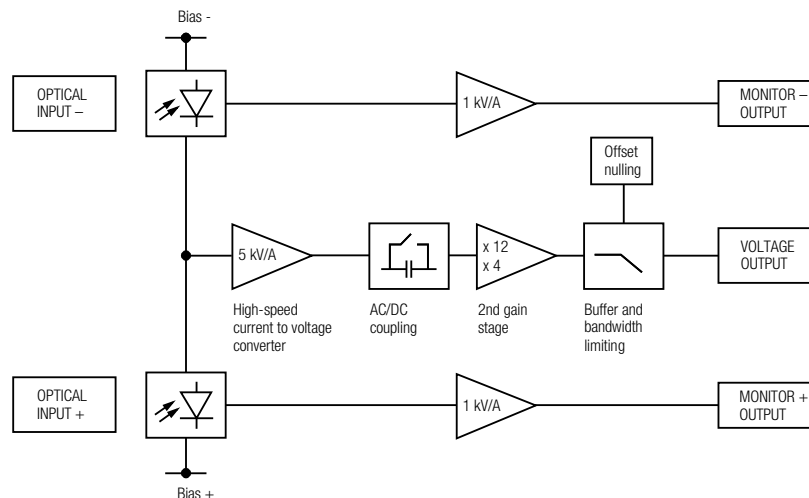

High-Speed Balanced Photoreceiver

Intended Use

The HBPR-100M-60K-SI-FC photoreceiver consists of a combination of two anti-parallel connected photodiodes with a subsequent low-noise transimpedance amplifier. It is designed for fast conversion of the tiny difference of two optical signals into an equivalent output voltage. Operation is mostly self-explanatory. If in doubt, consult this document or contact support@femto.de.

For safe operation, please refer to the damage thresholds specified in the "Absolute Maximum Ratings", "Temperature Range" and "Power Supply" sections of this document.

The operating environment must be free of smoke, dust, grease, oil, condensing moisture, and other contaminants that could affect the operation or performance.

Application Notes

The damage threshold of 12 mW for each photodiode mentioned in the "Absolute Maximum Ratings" section applies to reasonably homogeneous illumination of the photodiodes. Extreme focusing of the light beam can lead to damage to the photodiodes, even at significantly lower light power.

To achieve optimum performance, it is recommended that the CW light intensity at both inputs be well balanced. The monitor outputs can be used for continuous balance control. For setups with arbitrarily varying CW offset, the photoreceiver's AC mode can be helpful. Using AC mode increases the CW offset range to 450 μW (@ 850 nm), regardless of the gain setting.

Available Version

HBPR-100M-60K-SI-FC



fix/permanent FC fiber connectors
for high coupling efficiency, excellent conversion gain accuracy and common mode rejection ratio (CMRR)

Related Models

Various free space or fiber coupled HBPR models, with bandwidth up to 500 MHz, in the spectral range from 320 nm to 1700 nm are available.

Si Versions

Fiber-coupled with fix/permanent FC fiber connectors

HBPR-200M-30K-SI-FC Si-PIN Ø 0.8 mm, DC – 200 MHz, 320 – 1000 nm, CMRR 45 dB, gain $1.0 \times 10^4 / 3.0 \times 10^4$ V/A switchable

HBPR-500M-10K-SI-FC Si-PIN Ø 0.4 mm, DC – 500 MHz, 320 – 1000 nm, CMRR 40 dB, gain $5.0 \times 10^3 / 10.0 \times 10^3$ V/A switchable

Free space versions with 1.035"-40 threaded flanges

HBPR-100M-60K-SI-FST Si-PIN Ø 0.8 mm, DC – 100 MHz, 320 – 1000 nm, CMRR 50 dB, gain $2.0 \times 10^4 / 6.0 \times 10^4$ V/A switchable

HBPR-200M-30K-SI-FST Si-PIN Ø 0.8 mm, DC – 200 MHz, 320 – 1000 nm, CMRR 45 dB, gain $1.0 \times 10^4 / 3.0 \times 10^4$ V/A switchable

HBPR-500M-10K-SI-FST Si-PIN Ø 0.4 mm, DC – 500 MHz, 320 – 1000 nm, CMRR 40 dB, gain $5.0 \times 10^3 / 10.0 \times 10^3$ V/A switchable

High-Speed Balanced Photoreceiver

Related Models (continued)

InGaAs Versions

Fiber-coupled with fix/permanent FC fiber connectors (ball lense coupled)	
HBPR-100M-60K-IN-FC	InGaAs-PIN \varnothing 0.08 mm, DC – 100 MHz, 900 – 1700 nm, CMRR 55 dB, gain $2.0 \times 10^4 / 6.0 \times 10^4$ V/A switchable
HBPR-200M-30K-IN-FC	InGaAs-PIN \varnothing 0.08 mm, DC – 200 MHz, 900 – 1700 nm, CMRR 50 dB, gain $1.0 \times 10^4 / 3.0 \times 10^4$ V/A switchable
HBPR-500M-10K-IN-FC	InGaAs-PIN \varnothing 0.08 mm, DC – 500 MHz, 900 – 1700 nm, CMRR 45 dB, gain $5.0 \times 10^3 / 10.0 \times 10^3$ V/A switchable
Free space versions with 1.035"-40 threaded flanges	
HBPR-100M-60K-IN-FST	InGaAs-PIN \varnothing 0.3 mm, DC – 100 MHz, 800 – 1700 nm, CMRR 50 dB, gain $2.0 \times 10^4 / 6.0 \times 10^4$ V/A switchable
HBPR-200M-30K-IN-FST	InGaAs-PIN \varnothing 0.3 mm, DC – 200 MHz, 800 – 1700 nm, CMRR 45 dB, gain $1.0 \times 10^4 / 3.0 \times 10^4$ V/A switchable
HBPR-450M-10K-IN-FST	InGaAs-PIN \varnothing 0.3 mm, DC – 450 MHz, 800 – 1700 nm, CMRR 35 dB, gain $5.0 \times 10^3 / 10.0 \times 10^3$ V/A switchable

Available Accessory

PS-15-25-L




Power Supply
Input: 100 – 240 VAC
Output: ± 15 VDC

Specifications

Test conditions	$V_s = \pm 15$ V, $T_A = 25$ °C, output load impedance 50 Ω , warm-up 20 minutes (min. 10 minutes recommended), monitor outputs terminated with 1 M Ω		
Gain	Transimpedance gain	20×10^3 V/A (@ 2 nd gain $\times 4$, 50 Ω load), 60×10^3 V/A (@ 2 nd gain $\times 12$, 50 Ω load)	
	Gain accuracy	± 1 % electrical	
	Conversion gain	10.8×10^3 V/W typ. (@ 2 nd gain $\times 4$, 850 nm, 50 Ω load) 32.4×10^3 V/W typ. (@ 2 nd gain $\times 12$, 850 nm, 50 Ω load)	
	Common mode rejection ratio (CMRR)	50 dB typ. ($f \leq 100$ MHz)	
Frequency Response	Lower cut-off frequency	DC / 10 Hz, switchable	
	Upper cut-off frequency (–3 dB)	100 MHz / 20 MHz, switchable	
Time Response	Rise/fall time (10 % – 90 %)	3.3 ns 17.5 ns (@ bandwidth set to 20 MHz)	
	Input	Noise equivalent power (NEP)	minimum 6.5 pW/ $\sqrt{\text{Hz}}$ (@ 850 nm) 7.4 pW/ $\sqrt{\text{Hz}}$ (@ 850 nm, 20 MHz) 12.0 pW/ $\sqrt{\text{Hz}}$ (@ 850 nm, 50 MHz) 19.0 pW/ $\sqrt{\text{Hz}}$ (@ 850 nm, 100 MHz)
Maximum differential CW power (for linear amplification)		93 μ W (@ 2 nd gain $\times 4$, DC-coupled, 850 nm) 31 μ W (@ 2 nd gain $\times 12$, DC-coupled, 850 nm) 450 μ W (@ AC-coupled, 850 nm)	
Max. optical CW balanced power (common mode power)		10 mW (on each photodiode, @ 850 nm)	
Monitor optical saturation power (limited by maximum ratings)		12 mW (@ 850 nm)	
Detector		Detector type	Si-PIN photodiode in FC fiber connector
		Active area	\varnothing 800 μ m, suitable for fibers up to 400 μ m core diameter
	Spectral range	320 – 1000 nm	
	Sensitivity	0.54 A/W typ. (@ 850 nm)	


High-Speed Balanced Photoreceiver

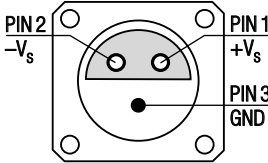Specifications (continued)		
Output	Output voltage range	± 1.0 V (@ 50 Ω load) for linear operation and low harmonic distortion
	Max. output voltage	± 2.0 V (@ 50 Ω load)
	Offset voltage compensation	± 100 mV typ., adjustable by offset potentiometer
	Output impedance	50 Ω (terminate with 50 Ω load)
	Slew rate	2000 V/ μ s
	Max. output current	70 mA
	Output reflection S22	-30 dB @ < 100 MHz -20 dB @ < 800 MHz
	Output noise (typ.)	2.1 mV RMS (14 mV peak-peak) (@ 2 nd gain $\times 4$) 5.8 mV RMS (38 mV peak-peak) (@ 2 nd gain $\times 12$) 0.5 mV RMS (3.2 mV peak-peak) (@ 2 nd gain $\times 4$, BW 20 MHz) 1.3 mV RMS (8.8 mV peak-peak) (@ 2 nd gain $\times 12$, BW 20 MHz) (@ 50 Ω load, no signal on detectors, measurement bandwidth 2 GHz)
Monitor Outputs	Gain	1×10^3 V/A (@ ≥ 100 k Ω load)
	Voltage range	0 ... +10 V (@ ≥ 100 k Ω load)
	Output impedance	50 Ω (terminate with ≥ 100 k Ω load)
	Max. output current	30 mA typ.
	Bandwidth	DC – 10 MHz
	Output noise	0.6 mV RMS (4 mV peak-peak) (@ 100 k Ω load, no signal on detectors, measurement bandwidth 200 MHz)
Power Supply	Supply voltage	± 15 V (± 14.5 V ... ± 16.5 V)
	Supply current	-90 / +120 mA typ. (depends on operating conditions, recommended power supply capability min. ± 200 mA)
Optical Input Connector	Material FC receptacle	nickel silver
Case	Weight	350 g (0.77 lbs)
	Material	AlMg3Mn, nickel-plated
Temperature Range	Storage temperature	-40 $^{\circ}$ C ... +85 $^{\circ}$ C
	Operating temperature	0 $^{\circ}$ C ... +60 $^{\circ}$ C
Absolute Maximum Ratings	Optical input power (CW)	12 mW (on each photodiode)
	Power supply voltage	± 20 V
Connectors	Inputs	FC fiber optic connectors (FC/PC and FC/APC compatible)
	Outputs	SMA jacks (female)
	Power supply	LEMO [®] series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52)
		 <p>PIN 1: +15 V PIN 2: -15 V PIN 3: GND</p>
Scope of Delivery	HBPR-100M-60K-SI-FC, Lemo [®] 3-pin connector, 3 \times adapter SMA (male) to BNC (female), datasheet	
Ordering Information	HBPR-100M-60K-SI-FC	FC fiber optic connectors (FC/PC and FC/APC compatible)

High-Speed Balanced Photoreceiver

Spectral Response

HBPR-100M-60K-SI-FC (FC fiber optic input)

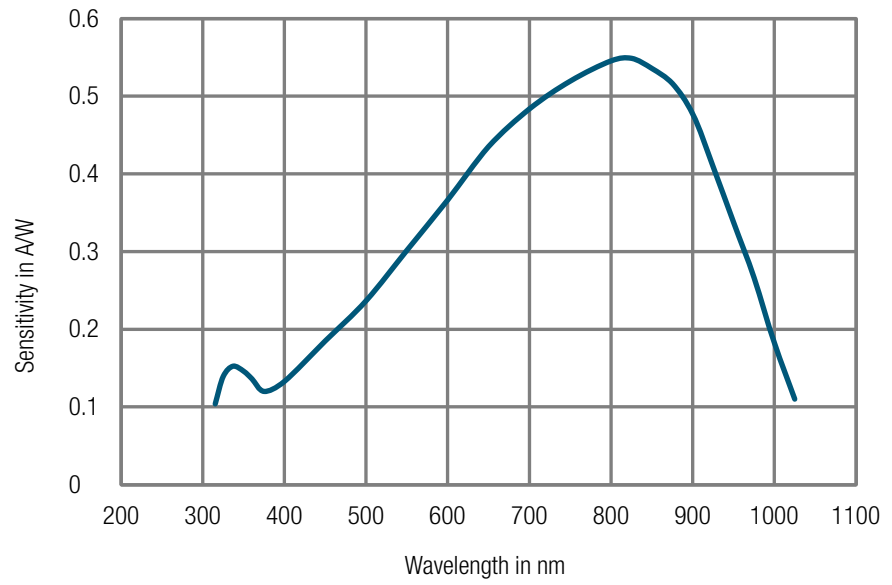


DB-Sens-HBPR-100-200-SI_R2

High-Speed Balanced Photoreceiver

Dimensions

HBPR-100M-60K-SI-FC

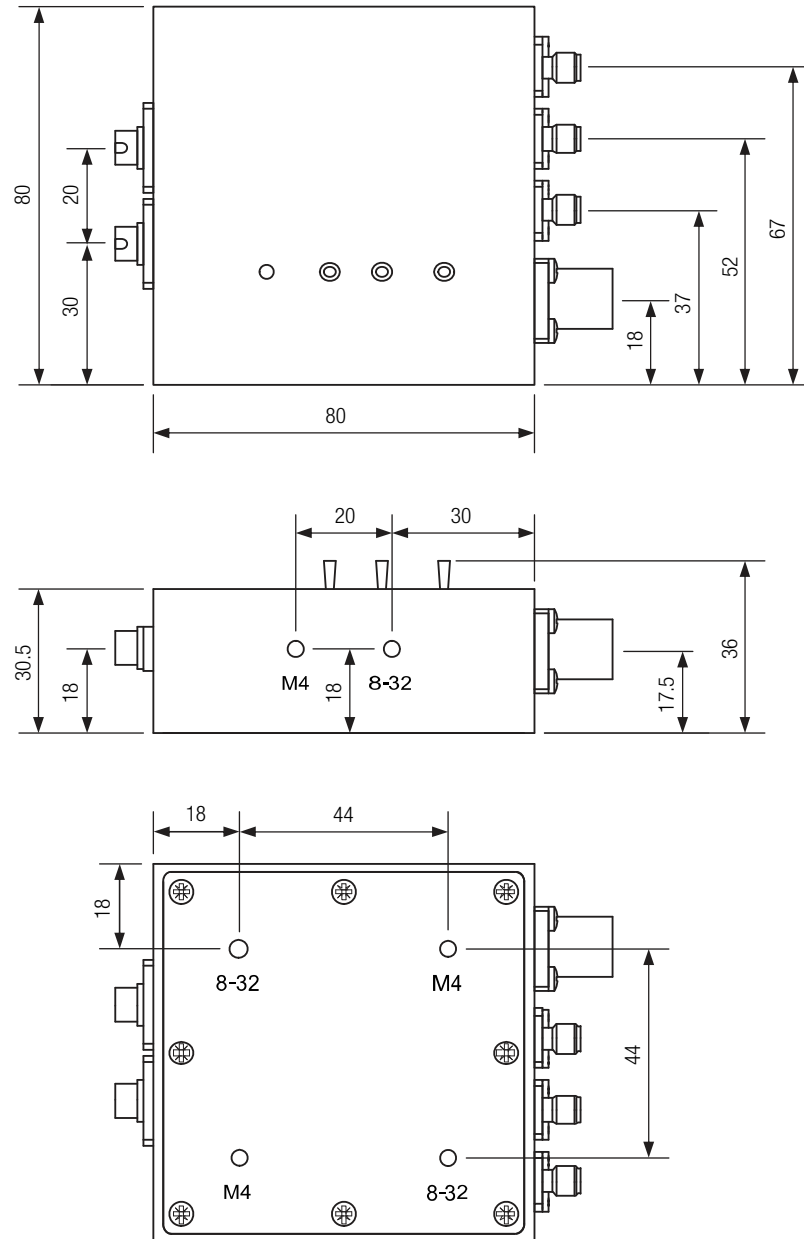

DZ-HBPR_FC_R2

all dimensions in mm unless otherwise noted

The base plate can be rotated if necessary. To do this, loosen the 8 screws.

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany