



Ultra Low Noise Current Amplifier

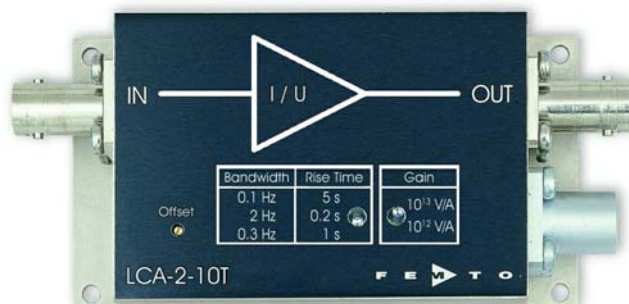

<p>Features</p>	<ul style="list-style-type: none"> • Switchable Transimpedance (Gain) 1×10^{12} V/A and 1×10^{13} V/A • Extremely Low Input Noise Current of $0.18 \text{ fA}/\sqrt{\text{Hz}}$ • Rise Time 0.2 s • Switchable Low Pass Filter 2 Hz, 0.3 Hz and 0.1 Hz • Protection against $\pm 2 \text{ kV}$ Transients 																																																							
<p>Applications</p>	<ul style="list-style-type: none"> • Very Sensitive Current and Charge Measurements • Spectroscopy • Photodiode Amplifier • Conductive Atomic Force Microscopy (cAFM) • Amplifier for Ionization and Charge Detectors • Characterization of Active Electronic Components • Preamplifier for Oscilloscopes, A/D-Converters, Digital Voltmeter etc. 																																																							
<p>Specifications</p>	<p><i>Test Conditions</i> $V_s = \pm 15 \text{ V}$, $T_a = 25^\circ\text{C}$</p> <table border="0"> <tr> <td style="vertical-align: top;">Gain</td> <td>Transimpedance</td> <td>1×10^{12} V/A and 1×10^{13} V/A (@ $\geq 1 \text{ M}\Omega$ load)</td> </tr> <tr> <td></td> <td>Accuracy</td> <td>$\pm 2 \%$</td> </tr> <tr> <td style="vertical-align: top;">Frequency Response</td> <td>Lower Cut-Off Frequency</td> <td>DC</td> </tr> <tr> <td></td> <td>Upper Cut-Off Frequency (- 3 dB)</td> <td>2 Hz, 0.3 Hz and 0.1 Hz</td> </tr> <tr> <td></td> <td>Rise- / Fall-Time (10 % - 90%)</td> <td>0.2 s, 1 s and 5 s</td> </tr> <tr> <td style="vertical-align: top;">Input</td> <td>Equ. Input Noise Current</td> <td>$0.18 \text{ fA}/\sqrt{\text{Hz}}$ (@ 0.2 Hz)</td> </tr> <tr> <td></td> <td>Integrated Input Noise</td> <td>0.3 fA peak-peak (@ 0.1 Hz bandwidth setting) 0.6 fA peak-peak (@ 0.3 Hz bandwidth setting) 2 fA peak-peak (@ 2 Hz bandwidth setting)</td> </tr> <tr> <td></td> <td>Input Bias Current</td> <td>10 fA typ.</td> </tr> <tr> <td></td> <td>Input Bias Current Drift</td> <td>factor 2 / 10°C</td> </tr> <tr> <td></td> <td>Offset Compensation Range</td> <td>$\pm 50 \text{ fA}$, adjustable by offset trimpot</td> </tr> <tr> <td></td> <td>Max. Input Current</td> <td>$\pm 10 \text{ pA}$ (for linear amplification @ 1×10^{12} V/A gain) $\pm 1 \text{ pA}$ (for linear amplification @ 1×10^{13} V/A gain)</td> </tr> <tr> <td></td> <td>Input Offset Voltage</td> <td>$< 0.5 \text{ mV}$</td> </tr> <tr> <td></td> <td>DC Input Impedance</td> <td>$1 \text{ k}\Omega$ (virtual) // 5 pF</td> </tr> <tr> <td style="vertical-align: top;">Output</td> <td>Output Voltage</td> <td>$\pm 10 \text{ V}$ (@ $\geq 1 \text{ M}\Omega$ load)</td> </tr> <tr> <td></td> <td>Output Impedance</td> <td>50Ω (terminate with $\geq 1 \text{ M}\Omega$ load for best performance)</td> </tr> <tr> <td></td> <td>Max. Output Current</td> <td>$\pm 10 \text{ mA}$ (for linear amplification)</td> </tr> <tr> <td style="vertical-align: top;">Power Supply</td> <td>Supply Voltage</td> <td>$\pm 15 \text{ V}$</td> </tr> <tr> <td></td> <td>Supply Current</td> <td>$\pm 15 \text{ mA}$ typ. (depends on operating conditions, recommended power supply capability minimum $\pm 50 \text{ mA}$)</td> </tr> </table>		Gain	Transimpedance	1×10^{12} V/A and 1×10^{13} V/A (@ $\geq 1 \text{ M}\Omega$ load)		Accuracy	$\pm 2 \%$	Frequency Response	Lower Cut-Off Frequency	DC		Upper Cut-Off Frequency (- 3 dB)	2 Hz, 0.3 Hz and 0.1 Hz		Rise- / Fall-Time (10 % - 90%)	0.2 s, 1 s and 5 s	Input	Equ. Input Noise Current	$0.18 \text{ fA}/\sqrt{\text{Hz}}$ (@ 0.2 Hz)		Integrated Input Noise	0.3 fA peak-peak (@ 0.1 Hz bandwidth setting) 0.6 fA peak-peak (@ 0.3 Hz bandwidth setting) 2 fA peak-peak (@ 2 Hz bandwidth setting)		Input Bias Current	10 fA typ.		Input Bias Current Drift	factor 2 / 10°C		Offset Compensation Range	$\pm 50 \text{ fA}$, adjustable by offset trimpot		Max. Input Current	$\pm 10 \text{ pA}$ (for linear amplification @ 1×10^{12} V/A gain) $\pm 1 \text{ pA}$ (for linear amplification @ 1×10^{13} V/A gain)		Input Offset Voltage	$< 0.5 \text{ mV}$		DC Input Impedance	$1 \text{ k}\Omega$ (virtual) // 5 pF	Output	Output Voltage	$\pm 10 \text{ V}$ (@ $\geq 1 \text{ M}\Omega$ load)		Output Impedance	50Ω (terminate with $\geq 1 \text{ M}\Omega$ load for best performance)		Max. Output Current	$\pm 10 \text{ mA}$ (for linear amplification)	Power Supply	Supply Voltage	$\pm 15 \text{ V}$		Supply Current	$\pm 15 \text{ mA}$ typ. (depends on operating conditions, recommended power supply capability minimum $\pm 50 \text{ mA}$)
Gain	Transimpedance	1×10^{12} V/A and 1×10^{13} V/A (@ $\geq 1 \text{ M}\Omega$ load)																																																						
	Accuracy	$\pm 2 \%$																																																						
Frequency Response	Lower Cut-Off Frequency	DC																																																						
	Upper Cut-Off Frequency (- 3 dB)	2 Hz, 0.3 Hz and 0.1 Hz																																																						
	Rise- / Fall-Time (10 % - 90%)	0.2 s, 1 s and 5 s																																																						
Input	Equ. Input Noise Current	$0.18 \text{ fA}/\sqrt{\text{Hz}}$ (@ 0.2 Hz)																																																						
	Integrated Input Noise	0.3 fA peak-peak (@ 0.1 Hz bandwidth setting) 0.6 fA peak-peak (@ 0.3 Hz bandwidth setting) 2 fA peak-peak (@ 2 Hz bandwidth setting)																																																						
	Input Bias Current	10 fA typ.																																																						
	Input Bias Current Drift	factor 2 / 10°C																																																						
	Offset Compensation Range	$\pm 50 \text{ fA}$, adjustable by offset trimpot																																																						
	Max. Input Current	$\pm 10 \text{ pA}$ (for linear amplification @ 1×10^{12} V/A gain) $\pm 1 \text{ pA}$ (for linear amplification @ 1×10^{13} V/A gain)																																																						
	Input Offset Voltage	$< 0.5 \text{ mV}$																																																						
	DC Input Impedance	$1 \text{ k}\Omega$ (virtual) // 5 pF																																																						
Output	Output Voltage	$\pm 10 \text{ V}$ (@ $\geq 1 \text{ M}\Omega$ load)																																																						
	Output Impedance	50Ω (terminate with $\geq 1 \text{ M}\Omega$ load for best performance)																																																						
	Max. Output Current	$\pm 10 \text{ mA}$ (for linear amplification)																																																						
Power Supply	Supply Voltage	$\pm 15 \text{ V}$																																																						
	Supply Current	$\pm 15 \text{ mA}$ typ. (depends on operating conditions, recommended power supply capability minimum $\pm 50 \text{ mA}$)																																																						

Ultra Low Noise Current Amplifier


Specifications (continued)		
Case	Weight Material	210 g (0.5 lbs) AlMg4.5Mn, nickel-plated
Temperature Range	Storage Temperature Operating Temperature	- 40 ... + 100 °C 0 ... + 60 °C
Absolute Maximum Ratings	Input Voltage Power Supply Voltage Transient Input Voltage	± 10 V ± 20 V ± 2 kV (discharge from 1 nF source)
Connectors	Input Output Power Supply	BNC BNC LEMO series 1S, 3-pin fixed socket Pin 1: + 15V Pin 2: - 15V Pin 3: GND



Application Diagrams	<p>Photo Detector Biasing in Photovoltaic Mode: Use for Low Speed Applications and Minimum Dark Current.</p> <p style="text-align: right;">AZ02-0101-20</p>
----------------------	---

Ultra Low Noise Current Amplifier

Dimensions

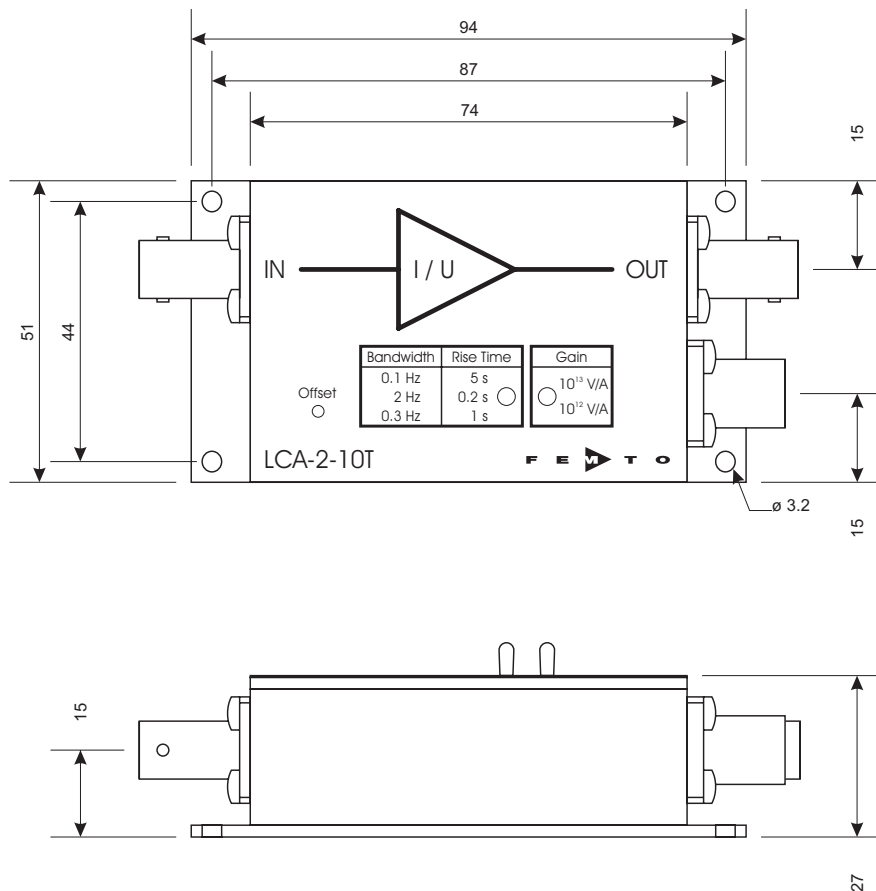

all measures in mm unless otherwise noted

DZ-LCA-2-10T_R2

FEMTO Messtechnik GmbH
 Paul-Lincke-Ufer 34
 D-10999 Berlin · Germany
 Tel.: +49 (0)30 – 4 46 93 86
 Fax: +49 (0)30 – 4 46 93 88
 e-mail: info@femto.de
 http://www.femto.de

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.
 © by FEMTO Messtechnik GmbH
 Printed in Germany