



ST120 QUAD


Silicon Based Thermopile Detector

Features: A four-channel silicon-based thermopile in a TO-5 package. Each small active area is 1.2mm x 1.2mm. Time constant of 25ms with Nitrogen encapsulation gas. Delivers a very low Temperature Coefficient of Responsivity of $-0.04\%/^{\circ}\text{C}$. This detector has a very short thermal shock response to ambient temperature change.


Options: 1) See [Standard Windows and Filters](#) for list of optical filter options. 2) Internal $30\text{k}\Omega$ 5% NTC chip thermistor provides ambient package temperature measurement. See [Thermistor Options](#) p/n: DC-4005. 3) Internal aperture precisely defines active area for applications with FOV and/or spot size requirements. See [Aperture Options](#) for available sizes. See [Thermopile Configuration Table](#) for more options.

Applications: Excellent for gas analysis, position sensor, and horizon sensor.

Benefit: Low cost and small active area size with high output.

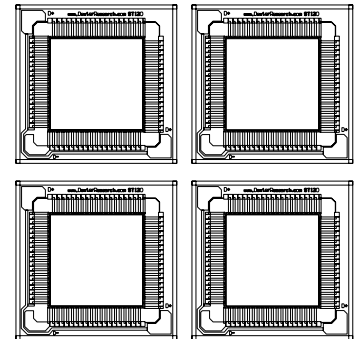

Detector circuit overlay

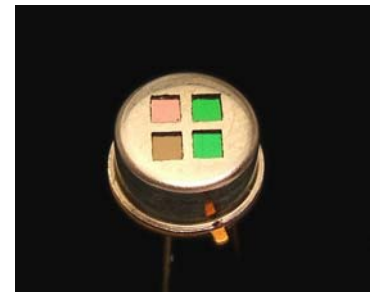

ST120 DUAL

Technical Specifications

Specifications apply at 23°C with KBr Window and Nitrogen encapsulating gas

Parameter	Min	Typical	Max	Symbol	Units	Comments
Active Area size		1.2 x 1.2		AA	mm	Hot junction size, per element.
Element Area		1.44		A	mm^2	
Number of Junctions		80				Per element.
Number of Channels		4				Per detector package.
Output Voltage		140		V_s	μV	DC, $H=330\mu\text{W}/\text{cm}^2$ (3)
Signal-to-Noise Ratio		3,649		SNR	$\sqrt{\text{Hz}}$	DC, $\text{SNR}=V_s/V_n$
Responsivity		29.5		\mathcal{R}	V/W	DC, $\mathcal{R}=V_s/HA$ (2)
Resistance		90		R	$\text{k}\Omega$	Detector element
Temperature Coefficient of \mathcal{R}		-.04			$\%/^{\circ}\text{C}$	Best linear fit, 0° to 85°C (1)
Temperature Coefficient of R		.02			$\%/^{\circ}\text{C}$	Best fit, 0° to 85°C (1)
Noise Voltage		38.4		V_n	$\text{nV}/\sqrt{\text{Hz}}$	$V_n^2=4\text{kTR}$
Noise Equivalent Power		1.30		NEP	$\text{nW}/\sqrt{\text{Hz}}$	DC, $\text{NEP}=V_n HA/V_s$ (2)
Detectivity		0.92		D^*	$10^8\text{cm}\sqrt{\text{Hz}}/\text{W}$	DC, $D^*=V_s/V_n H\sqrt{A}$ (2)
Time Constant		25		\mathcal{T}	ms	Chopped, -3dB point (1)
Field of View		$9^{\circ}/63^{\circ}$		FOV	Degrees	See Assembly Drawings for FOV Description.
Package Type		TO-5				Standard package hole size: .060" x .060"
Element Matching		25		\mathcal{M}	%	$\mathcal{M}= V_A-V_B /V_B$ (2)
Element Separation		2.08			mm	Center to Center
Operating Temperature	-50		125	T_a	$^{\circ}\text{C}$	

General Specifications: Flat spectral response from 100nm to $>100\mu\text{m}$. Linear signal output from 10^{-6} to $0.1\text{W}/\text{cm}^2$. Maximum incident radiance $0.1\text{W}/\text{cm}^2$, damage threshold $\geq .5\text{W}/\text{cm}^2$

Notes: (1) Parameter is not 100% tested. 90% of all units meet these specifications. (2) A is detector area in cm^2 . (3) Test Conditions: 500K Blackbody source; Detector active surface 10cm from 0.6513cm Diameter Blackbody Aperture.