


LIM-162-#

Dual channel pyroelectric multicolor detector
uncompensated, CMOS preamplifier (PyroMid®)

Description: LIM-162-#


[# = extension code]

dual color, TO39 housing;
current mode with micro power OpAmp; feedback R 24GOhm ±10% // C 0.20±0.1pF;
high gain

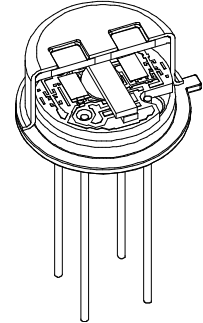


PyroMid® detectors are State-of-the-art, cost effective, multicolor detectors for virtually any infrared application.


Housing:

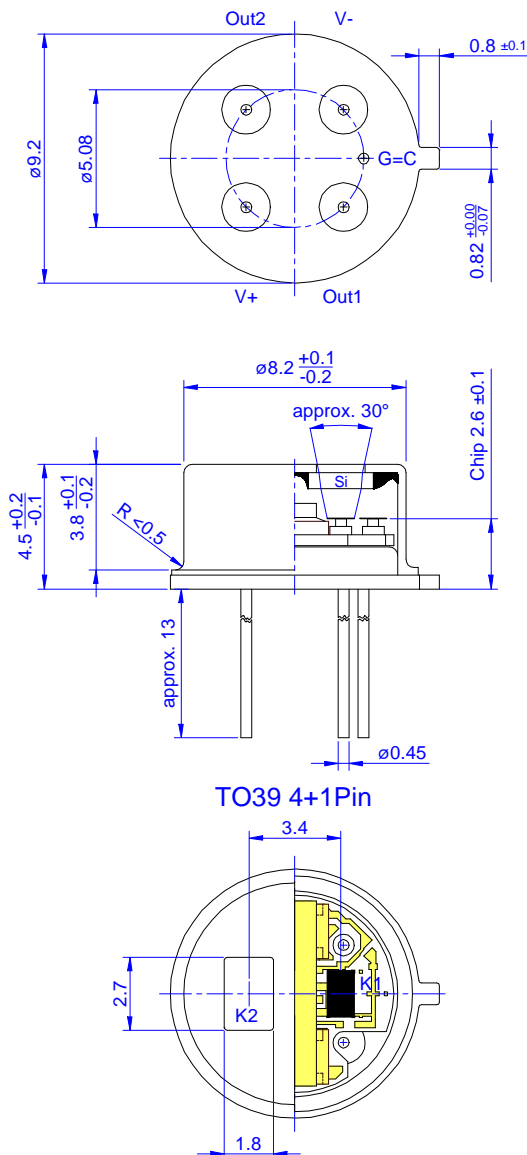

Pin assignment:

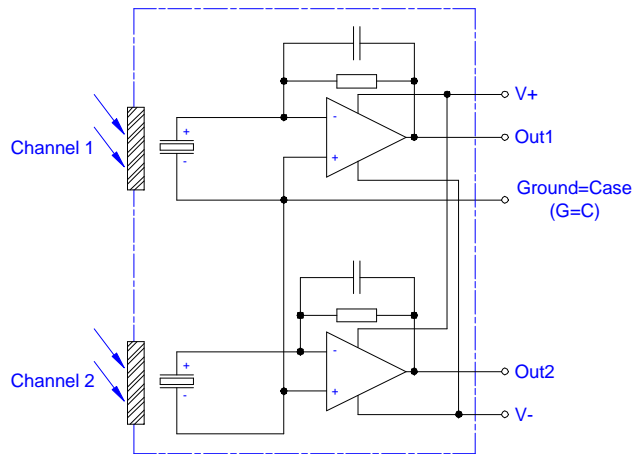

Frequency response:

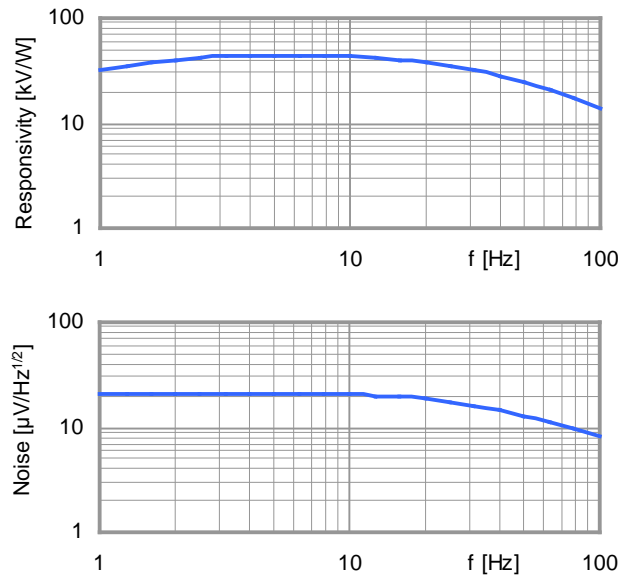

Multi-color Products

InfraTec GmbH
Infrarotsensorik und Messtechnik
Gostritzer Str.61-63
01217 Dresden / Germany
E-Mail: sensor@InfraTec.de
http://www.InfraTec.de

distributed by:

ELECTRO OPTICAL COMPONENTS, Inc.
5460 Skylane Blvd.
Santa Rosa, California 95403




Tel: 707-568-1642
Fax: 707-568-1652
E-Mail: info@eoc-inc.com
http://www.eoc-inc.com

LIM-162-#

Dual channel pyroelectric multicolor detector
uncompensated, CMOS preamplifier (PyroMid®)

Test circuit:

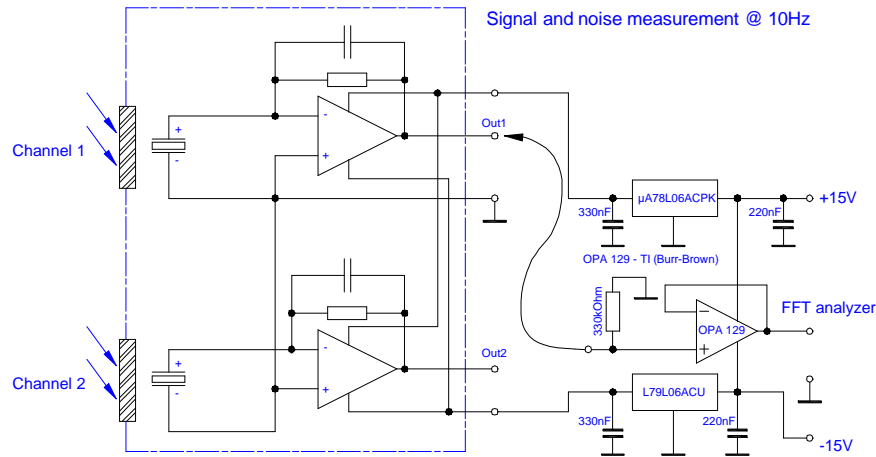

Parameters:

Aperture size	nom	ø6.0 mm, single channel 2.7x1.8 mm ²
Element size / type	nom	1.0x1.8 mm ² lithium tantalate with black layer
Thermal time constant	typ	150 ms
Feedback resistor	nom	24 GOhm ±10%
Feedback capacitor	nom	0.2±0.1 pF
Polarity	nom	negative signal by positive IR flux change
Voltage Responsivity {500K, 10Hz, 25°C, without window}	min	32,000 V/W
Noise density {10Hz, BW 1Hz, 25°C}	max	24 μV/Hz ^{1/2}
Detectivity {500K, 10Hz, 1Hz, 25°C, without window}	min	1.8*10 ⁸ cmHz ^{1/2} /W
CMOS operational amplifier	nom	OpAmp2 (for characteristics see application note)
Supply voltage V ⁺ - V ⁻	max	16 V
Operating supply voltage V ⁺ / V ⁻		+2.2 ... 8.0 V / -2.2 ... -8.0 V
Recommended supply voltage	nom	V ⁺ = +5 V; V ⁻ = -5 V
Supply current {output load 1MOhm}	max	150 μA
Offset voltage {25°C; output load 1MOhm}		-5 mV ... +5 mV
Optimal output load	nom	330 kOhm
Absolute output current	max	± 0.4 mA
Operating / Storage temperature	nom	-25 ... +85°C
Window cap		All InfraTec windows and filters are available (except KBr and CsI). Customized filters upon request.

InfraTec reserves the right to change these specifications at any time without notification!
© InfraTec GmbH, October 18th 2005

InfraTec GmbH

Infrarotsensorik und Messtechnik
Gostritzer Str.61-63

01217 Dresden / Germany

E-Mail: sensor@InfraTec.de
http://www.InfraTec.de

distributed by:

ELECTRO OPTICAL COMPONENTS, Inc.

5460 Skylane Blvd.

Santa Rosa, California 95403

Tel: 707-568-1642

Fax: 707-568-1652

E-Mail: info@eoc-inc.com

http://www.eoc-inc.com

