

UV Sensor Probe

GUVA-T13GC-3LW6




Features

- Single Supply Voltage, Analog Voltage Output
- Water Environment (10 bar)

Applications

UV Curing Lamp Monitoring

UV-A Lamp Monitoring

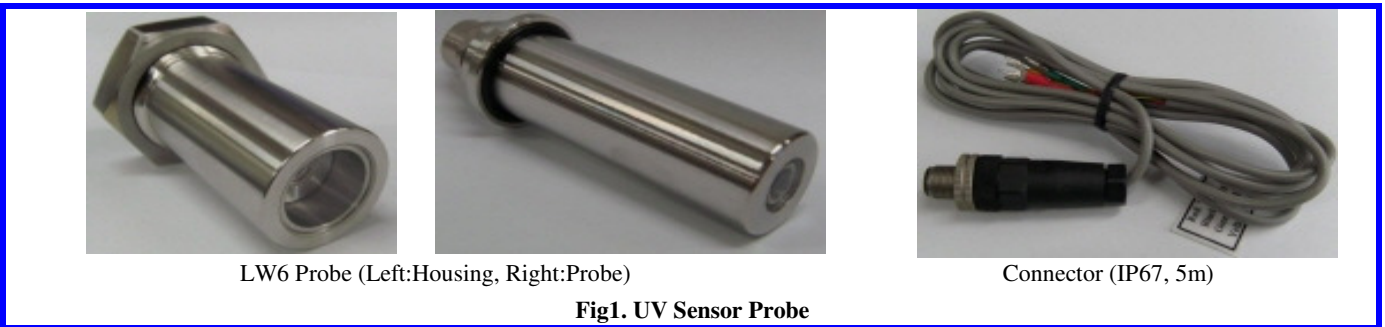

Case dimensions

Thread/Length for probe hold	Diameter (mm)	Window (mm)	Depth (mm)	Length (mm)	Weight (g)	Body (stainless steel)
M36x1.5p/12 mm	32	24	59	96	545	316-L (1.4404)

Absolute Maximum Ratings


Parameter	Symbol	Value			Unit	Remark
		Min.	Typ.	Max.		
Storage Temperature	T _{st}	-40		90	°C	
Operating Temperature	T _{op}	-30		85	°C	

Electro-Optical Characteristics (at 25 °C)


Parameter	Symbol	Value			Unit	Remark
		Min.	Typ.	Max.		
Supply Voltage	V _{cc}	6	24	26	V	DC
Supply Current	I _Q		3.3		mA	
Spectral Detection Range	λ	220		370	nm	10% of Max.
Output Voltage	V _{out}	0		5	V	
Detection Power Range	P	0		100	mW/cm ²	
Response Time	T		5		ms	

* Maximum of detection power : 10 mW/cm² (Option), 100 mW/cm² (Standard), 1000 mW/cm² (Option)

Relative Responsivity

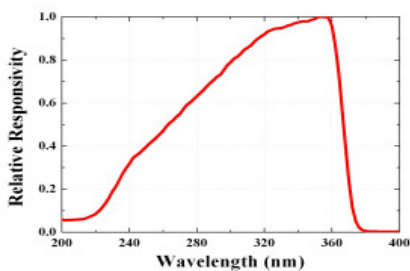

Output Voltage along UV power

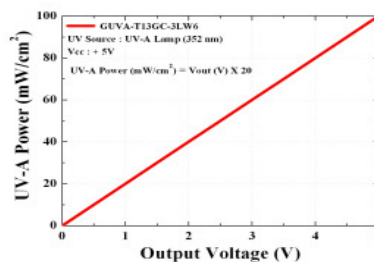

$$\begin{aligned} \text{UVA Power (mW/cm}^2\text{)} \\ &= \\ &\text{Vout (V)} \times 20 \end{aligned}$$

* Cover thread with teflon tape or ceramo paste before turning in. Please also use a sealing ring behind thread.