


# Model IMM-1255FB-650-5-E-G-L


Order Number: 1206000010

## Applications

- Industrial alignment
- Positioning
- Construction laser applications
- Metrology

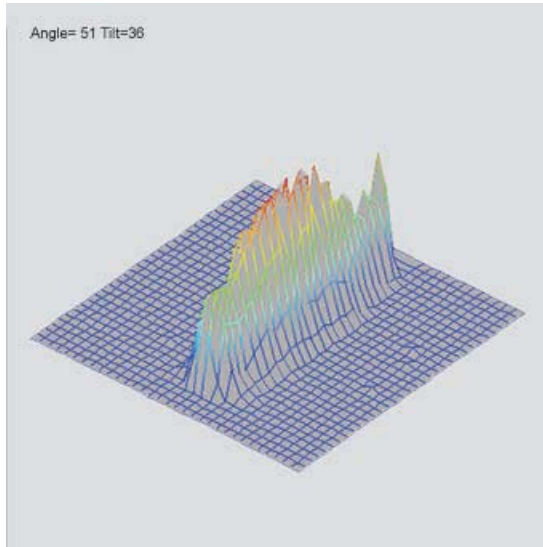

Typical Beam Profile

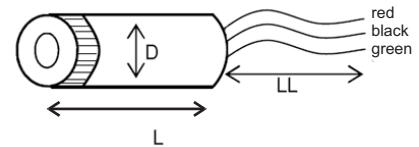

Dimensions according to DIN ISO 2768 f  
if not specified otherwise. Drawing not in scale

D (mm)	12
L (mm)	55 <sup>2)</sup>
LL (mm)	150 ± 20

Parameter @ Tc=25°C	Min.	Typ.	Max.
Wave length	n. a.	650 nm	660 nm
Operating temperature	-10 °C	25 °C	70 °C
Storage temperature	-25 °C	n. a.	85 °C
Beam diameter @ 1/e <sup>2</sup>		3.4 x 0.8 mm <sup>2</sup>	
Focal length range	20 mm		∞
Beam divergence			0.8 mrad
Beam deviation			25 mrad
Optical output power			4.99 mW
Operating voltage Vcc	4.5 V DC		5.5 V DC
Operating current			80 mA
Laser protection class	3R @ max. Popt		
Lens type	Aspherical glass lens		
Casing	Aluminium black anodized		
Beam setting	Adjustable focus		

## Compliant with RoHS-requirements (2002/95/EG vom 27.01.2003)

- Features:**
- Modulation / Power adjustment via analog input
  - Threaded focus adjustment
  - Diaphragm optional
  - Case insulated

Note: The above product specifications are subject to change without notice.

<sup>1)</sup> optional

<sup>2)</sup> typ. @ collimated beam



**Electro Optical Components, Inc.**

5460 Skylane Boulevard, Santa Rosa, CA 95403

Phone: (707) 568-1642 • FAX: (707) 568-1652