


Model IMM-1255L-635-1.0-100-K


Order Number: 1206000025

Applications

- Positioning
- Construction laser applications
- Alignment
- Levelling

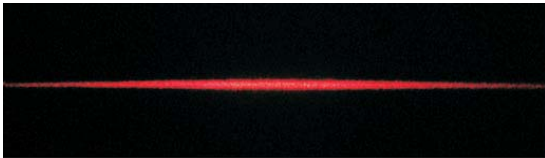

Gaussian Laserline



Dimensions according to DIN ISO 2768 f if not specified otherwise. Drawing not in scale

D (mm)	12
L (mm)	55
LL (mm)	150 ± 20

Parameter @ Tc=25°C	Min.	Typ.	Max.
Wave length	n. a.	635 nm	643 nm
Operating temperature	5 °C	25 °C	40 °C
Storage temperature	-25 °C	n. a.	70 °C
Line width @ 1 m distance		1 mm	
Line length @ 1 m distance		2.3 m	
Apperture angle of the line		100 °	
Optical output power			1 mW
Operating voltage Vcc	3 V DC		6 V DC
Operating current			50 mA
Laser protection class	2		
Lens type	Aspherical plastic lens		
Casing	Aluminium black anodized		

Compliant with RoHS-requirements (2002/95/EG vom 27.01.2003)

Features: - Case insulated

Note: The above product specifications are subject to change without notice.



Electro Optical Components, Inc.

5460 Skylane Boulevard, Santa Rosa, CA 95403

Phone: (707) 568-1642 • FAX: (707) 568-1652