


DL-3147-260

Wellenlänge: 650nm (typ.)
 Geringer Schwellstrom: 20mA (typ.)
 Max. Ausgangsleistung: 5mW bei +70°C
 TE mode

Anwendungsgebiete:
 DVD-ROM
 DVD-RAM-Reading




Maximalwerte

Parameter		Symbol	Wert	Einheit
Ausgangsleistung	CW	Po	7	mW
	Laser	VR	2	V
Sperrspannung	Laser	VR	2	V
	PIN	VR	30	V
Betriebstemperatur		Topr	-10...+70	°C
Lagertemperatur		Tstr	-40...+85	°C

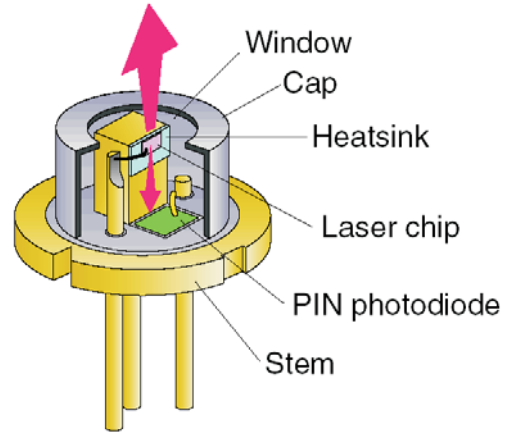


Elektrische und optische Eigenschaften bei 25°C

Parameter	Symbol	Betriebsbedingung	Min.	Typ.	Max.	Einheit	
Schwellstrom	I _{th}	CW	---	20	35	mA	
Betriebsstrom	I _{op}	Po=5mW	---	30	45	mA	
Betriebsspannung	V _{op}	Po=5mW	---	2,3	2,6	V	
Wellenlänge	λ	Po=5mW	645	650	660	nm	
Strahl- divergenz	Senkrecht	θ ⊥	---	25	30	35	deg.
	Parallel	θ	---	7	8	10	deg.
Strahl- abweichung	Senkrecht	Δ θ ⊥	---	---	+/-3	deg.	
	Parallel	Δ θ	---	---	+/-2	deg.	
Differentieller Wirkungsgrad	dPo/dI _{op}	Po=5mW	0,3	0,5	0,8	mW/mA	
Monitordiodenstrom	I _m	Po=5mW	0,08	0,20	0,4	mA	
Astigmatismus	As	Po=5mW	---	8	---	μm	

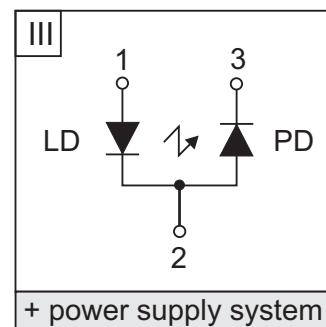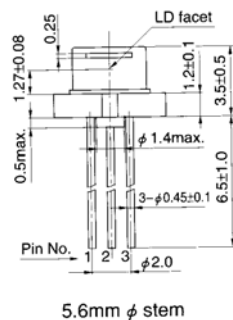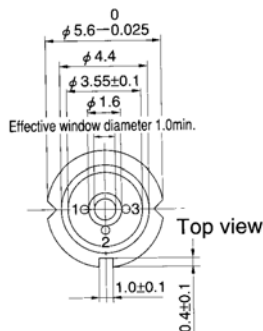


Characteristics


Output power vs. Forward current

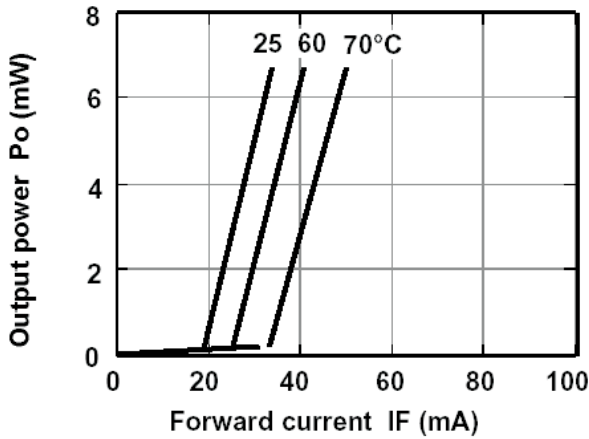


Threshold current vs. Temperature

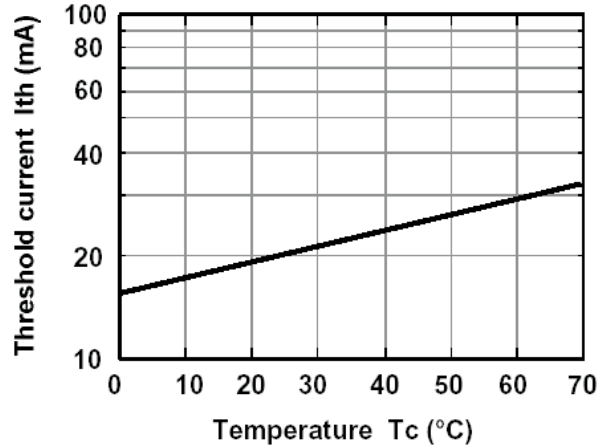


Monitoring current vs. Output power

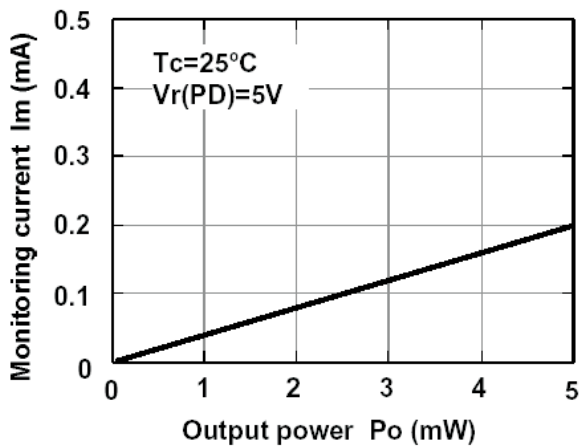


Beam divergence

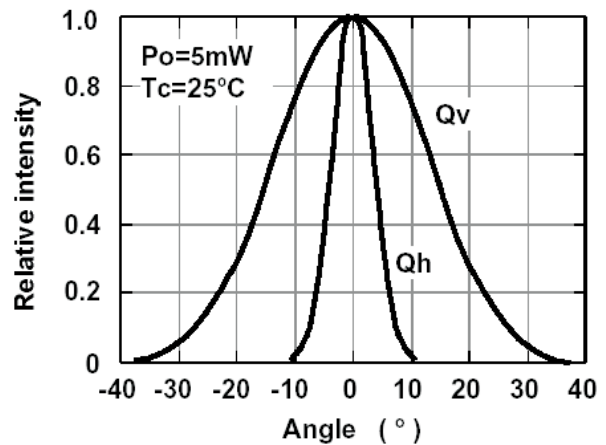

Lasing wavelength vs. Temperature

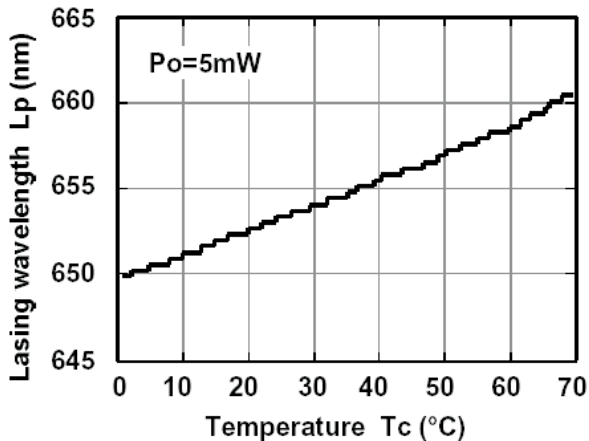

Lasing wavelength vs. Output power

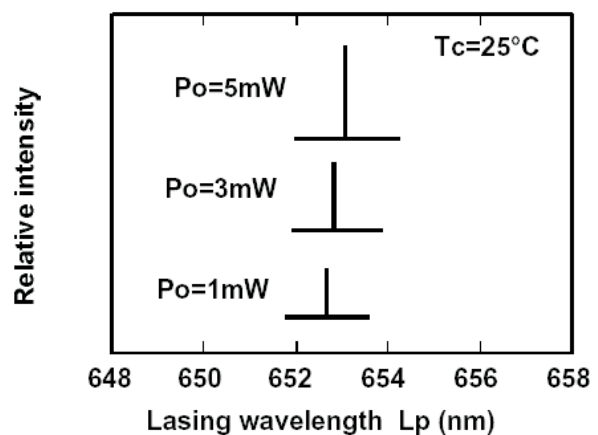

This is typical data and it may not represent all products.

Judgement: $\log x 1,2$
MTTF: 70°C; 5mW; 15000h

This is an example of MTTF data

Laserdiode DL-3147-260

