



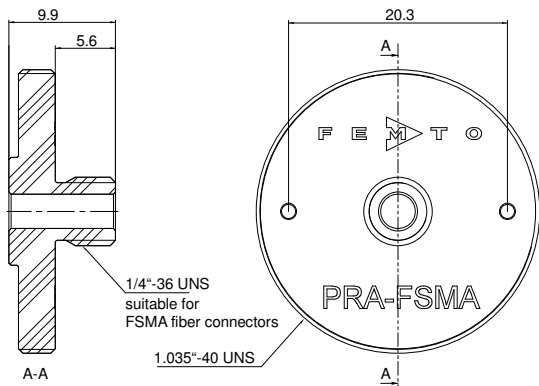
Datasheet

PRA-FSMA

**FSMA Fiber-Adapter
with External 1.035"-40 Thread**



The picture shows fiber-adapter PRA-FSMA with photoreceiver OE-300-SI-10-FST.

<p>Features</p>	<ul style="list-style-type: none"> • Connects FSMA fibers (FSMA connectors with \varnothing 3.175 mm ferrules) to FEMTO photoreceivers with threaded 1.035"-40 free space input (FST-version) • Recommended for photosensitive areas of 0.4 mm diameter or more (coupling efficiency may be compromised for photodiodes with smaller diameter) • Machined from solid stainless steel
<p>Applications</p>	<ul style="list-style-type: none"> • Allows to use the same photoreceiver for free-space and fiber applications
<p>Scope of Delivery</p>	<p>PRA-FSMA, datasheet, transport package</p>
<p>Specifications</p> <p>General Data</p> <p>Dimensions</p>	<p>Material 1.4305 stainless steel; glass bead blasted</p>  <p>1/4"-36 UNS suitable for FSMA fiber connectors</p> <p>1.035"-40 UNS</p> <p>All measures in mm unless otherwise noted.</p>