



**Electro Optical Components, Inc.**

5464 Skylane Boulevard, Suite D, Santa Rosa, CA 95403

Toll Free: 855-EOC-6300

[www.eoc-inc.com](http://www.eoc-inc.com) | [info@eoc-inc.com](mailto:info@eoc-inc.com)



# Fiber Optic ATR-Probes



**art photonics**



**FlexiSpec<sup>®</sup>**

High throughput in any part  
of Near & Mid InfraRed-spectrum

ATR-tip shaped for immersion  
in liquid flow without dead zone

Flexible and robust for industrial  
applications in harsh environment

Compatible with all spectrometers  
and automated process-interfaces


*FlexiSpec<sup>®</sup>* product line from **art photonics** is the latest generation of Attenuated Total Reflection Near & Mid IR-fiber ATR-Probes produced for any type of FT-NIR, FT-IR and other IR-spectrometers, photometers and IR-LED or QCL spectral sensors.

ATR immersion fiber optic probes with patented design are suitable for reaction monitoring in lab, pilot plant and for full automated process control.

#### **Applications:**

- Reaction Monitoring in real time
- Process Analytical Technologies (PAT)
- Remote Polymerization Control
- Crystallization Process Screening
- In-situ IR-Spectroscopy for PAT  
in Chemical, Petrochemical, Atomic,  
Biopharmaceutical & Food Industry

Transmission spectra of ATR probes. Probe length 1.5m

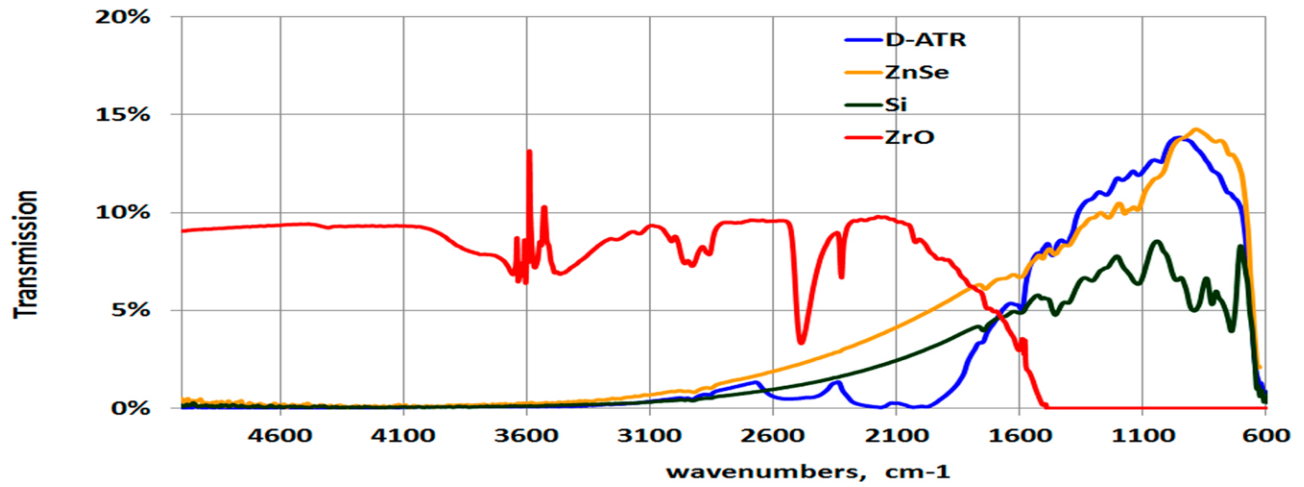

### Specification of Fiber Optic Immersion ATR-Probes *FlexiSpec*<sup>®</sup>

Probe type	Diamond ATR	ZnSe ATR	Silicon	Cubic Zirconium ATR
<b>Transmission range</b>	5.2-17µm (600-1900cm <sup>-1</sup> )	3.2-17µm (600-3100cm <sup>-1</sup> )	3.2-17µm (600-3100cm <sup>-1</sup> )	1.5-6.5µm (1550-6650cm <sup>-1</sup> ) + 1.1-6.5µm (650-9000cm <sup>-1</sup> )
<b>Fiber type</b>	PIR-900/1000	PIR-900/1000	PIR-900/1000	CIR-500/550
<b>Temperature range</b>	-150°C / + 140°C	-150°C / + 140°C	-100°C / + 140°C	-150°C / + 90°C
<b>Pressure (max)</b>	200Bar, 300 Bar on request	10Bar	100Bar	100Bar

### Common Parameters of Fiber Optic ATR-Probes *FlexiSpec*<sup>®</sup>

<b>Total Length</b>	1.5m (opt.: 1m to 5m)*	
<b>Shaft Length</b>	300mm (opt.: 100mm to 700mm)*	
<b>Shaft Diameter</b>	12mm, 6.3mm (opt.: 3mm)*	
<b>Shaft Material</b>	Hastelloy C22	
<b>Length of Legs</b>	500mm (opt.: 200mm to 500mm)	
<b>Protective Tube Material</b>	Liquid Tight SS-Conduit, KOPEX-Tube	
<b>Minimal Bending Radius</b>	130mm	
<b>Input / Output Connectors</b>	Long SMA (opt.: any other type)	
<b>Compatible Process-Interfaces</b>	Ceramat-FOS** or SensoGate-FOS**	
*Customized dimensions are available on request **Available for 12mm shafts only on request		

