



Electro Optical Components, Inc.


5464 Skylane Boulevard, Suite D, Santa Rosa, CA 95403

Toll Free: 855-EOC-6300

www.eoc-inc.com | info@eoc-inc.com



Spectral Response of photodiodes with cut-off 2.4 μm

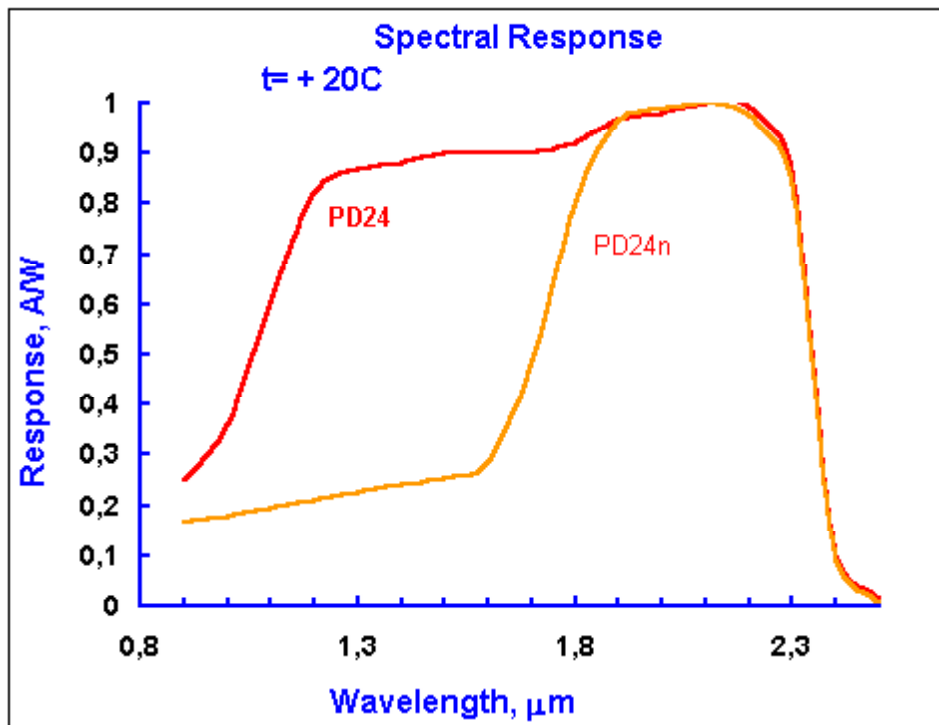

Photodiodes PD24 structure:

Here are presented typical curves of response vs wavelength at room temperature. 2.4 μm cut-off is measured at 10% of the maximum responsivity. Besides standard models PD24 based on heterostructure with AlGaAsSb wide band-gap "window", narrow spectrum photodiodes (PD24n) with GaSb "window" are also available.

