



Electro Optical Components, Inc.

5464 Skylane Boulevard, Suite D, Santa Rosa, CA 95403

Toll Free: 855-EOC-6300

www.eoc-inc.com | info@eoc-inc.com

Click to go to
Product Selector



Data Sheet Power Series
EOC-IRE-2000R-9-SAF

Thermal Infrared Emitter


Power Series

Thermal Infrared Emitters

EOC's infrared radiation sources are pulsable thermal emitters with a near black-body emittance. Based on a patented nanotechnology and a patented emitter set-up made of a high-melting metal, the free-standing monolithic radiating element and the nanostructured emitter surface offer numerous advantages in many applications.

The Power Series emitters have an integrated reflector that directs the radiation emitted from the rear to the front through the housing window in order to achieve maximum efficiency. Infrasolid's advanced packaging technology allows soldered sapphire, CaF₂ and BaF₂ windows for use in a wide temperature range of -25 °C up to +85 °C.

Key features

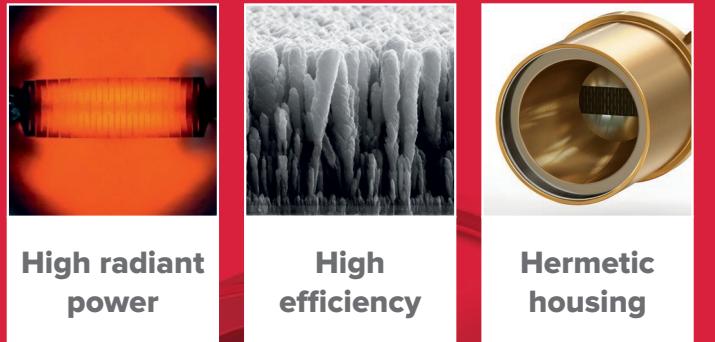

*innovative infrared sources for
gas detection & spectroscopy*




Main specifications

Parameter	EOC-IRE-2000R-9-SAF
Package	TO-8
Radiating element area	40 mm ²
Radiating element emissivity	> 0.9
Radiating element temperature	630 °C at 2.5 W
Optical output power	up to 560 mW
Max. electrical power (DC)	2.5 W
Max. electrical voltage	3.8 V
Max. electrical current	660 mA
Electrical resistance	5...6 Ω
Modulation frequency*	4 Hz
Filter (soldered window)	Sapphire
Wavelength range	2 to 6 μm
Filling gas (other gases possible):	N ₂


* 50 % modulation depth, square wave signal, 50 % duty cycle

- ✓ Pulsable thermal black-body infrared source mounted in an industry standard TO-8 package.
- ✓ Patented nanostructured radiating element achieves up to 500% more detection signal!
- ✓ Lower radiating element temperature of 630 °C increases lifetime!
- ✓ Soldered, high-quality filter windows guarantee considerably less drift. Leakage tested!
- ✓ Wide wavelength range enables a broad range of applications.


Optical specifications

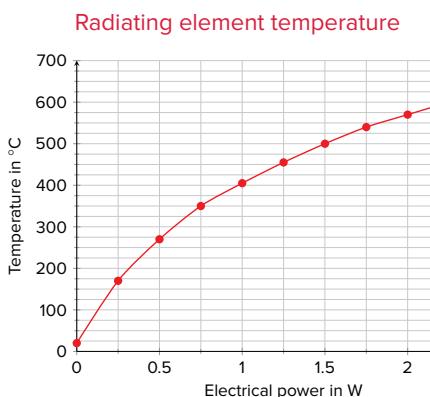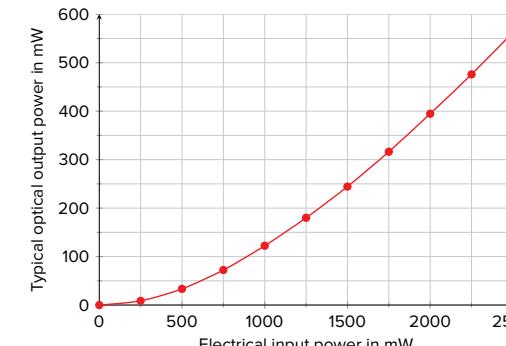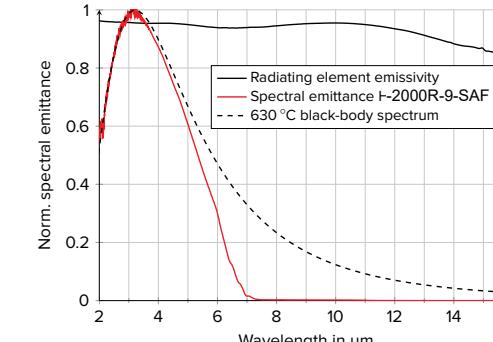


Modulation depth

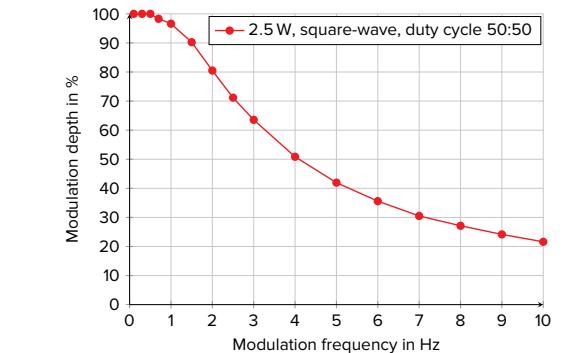


Electrical specifications

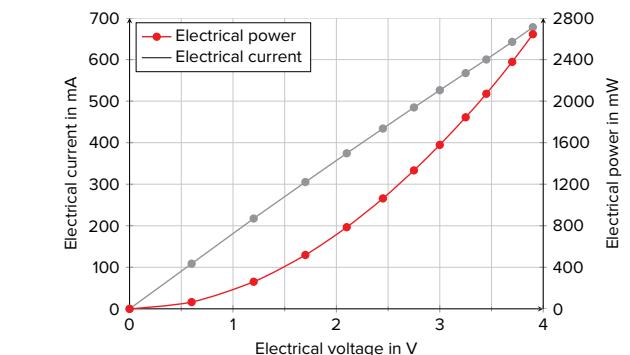

Window material transmissivity

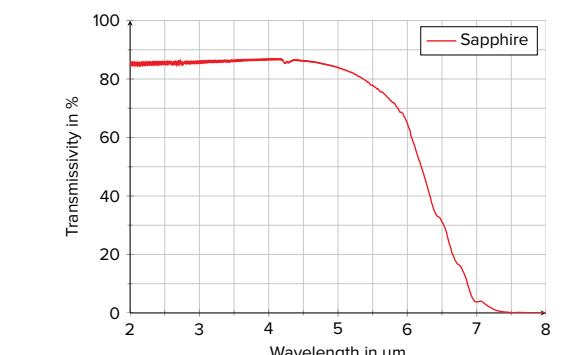

EOC-IRE-2000R-9-SAF

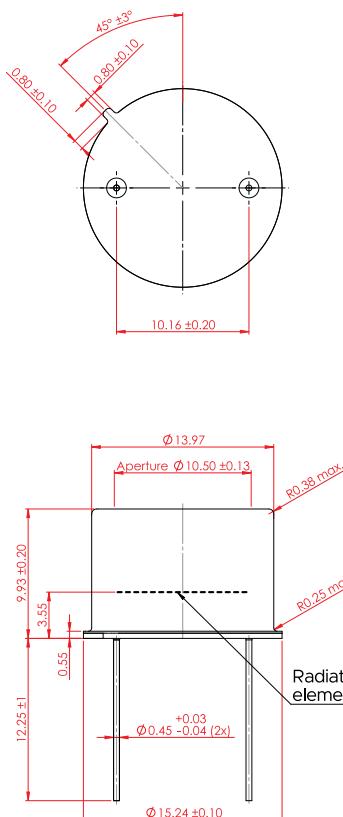

Angular radiation distribution

