



Electro Optical Components, Inc.

5464 Skylane Boulevard, Suite D, Santa Rosa, CA 95403

Toll Free: 855-EOC-6300

www.eoc-inc.com | info@eoc-inc.com



Datasheet

Low Noise Micro Spectrometer - P
High Speed Low Noise - H

**EOC-SI-2000P
& H**

FEATURES

- Spectral region: 200-1100 nm.
- Spectral resolution: 0.01-4 nm.
- Linear low noise CMOS detector with 2048 pixel.
- Optical configuration: crossed C-T.
- Integration times: 2ms-130s.
- Supply voltage: DC 5V (USB Power).
- 18 bit (output 16 bit), 2MHz A/D Converter.
- Interface: USB2.0 or UART.
- 20-pin connector for interfacing to external products.

APPLICATIONS

- LED sorting machine
- Multi-parameter online water quality analyzer
- Micro-volume, fast spectrophotometer
- Fluorescence spectrometer
- Biochemical analyzer
- Transmittance and Reflectance detection
- LIBS

GENERAL DESCRIPTION

EOC-SI-2000P is the foundation of Optosky in

EOC-SI-2000, a high-performance multi-purpose spectrometer using a number of breakthrough technologies was launched.

The CMOS detector exposure time can be controlled within 1ms, and customers can

precisely control the signal-to-noise ratio of the spectrometer.

ATP2000P is an ideal choice for UV, visible,

and near-infrared spectroscopy applications. It has different slits, gratings, mirrors, and filters to choose from. Spectrometer can be configured to suit different applications according to your needs. The spectral range starts from 200nm to 1100nm, spectral resolution can be selected

from 0.5 to 4.0nm, Optosky can also provide customized options for OEM customers.


ATP2000P can receive the light to be measured from the SMA905 interface optical fiber input or free space input, measure according to the set integration time, and output the measurement results through USB2.0 (high speed) or UART.



1 Specifications

| Detector | |
|----------------------------|--|
| Type | Linear array detector |
| Detectable range | 200-1100 nm |
| Effective pixel | 2048 |
| Pixel dimension | 14μm×200μm |
| Sensitivity | 1300 V/(lx · s) |
| Dark noise | 0.4V/RMS |
| Optical Parameter | |
| Wavelength range | 200-400nm, 200-850nm, 200-1000 nm, etc. Different ranges can be customized |
| Optical resolution | 0. 1-4 nm (depends on the slit, spectral range) |
| Signal-to-noise | >2000:1 |
| Dynamic range | 10000:1 |
| Optical Configuration | |
| Optical Design | F/4 crossed asymmetrical C-T |
| Focal Distance | 40 mm for incidence / 60 mm for output |
| Incidence slit | 5, 10, 25, 50, 100, 150, 200 μm optional, other sizes can be customized |
| Incident Interface | SMA905 connector, free space |
| Electrical Parameter | |
| Integration time | 0.1 ms - 130s |
| Interfaces | USB 2.0 or UART |
| A/ D conversion resolution | 18 bit (output 16 bit) |
| Supply voltage | DC4.5 to 5.5 V (type @5V) |
| Operating current | 170mA@Typ. |
| Working temperature | 0°C to +40°C |
| Working humidity | < 90%RH |
| Physics Parameter | |
| Dimension | 102×72×34 mm |
| weight | 0.2 kg |

2 Mechanical Diagrams

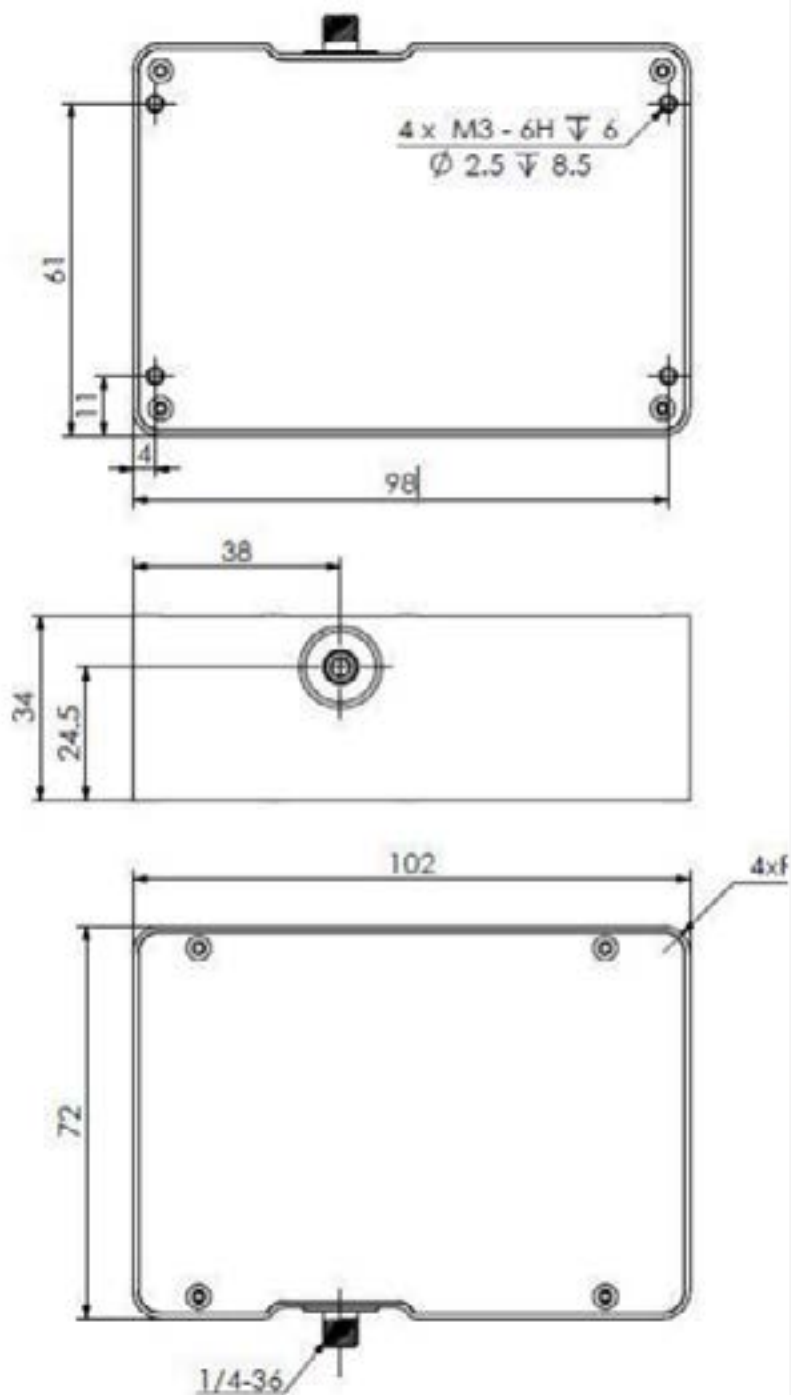


Mounting holes (M3×4)

SMA905 Female Fiber interface

The size of EOC-SI-2000 micro spectrometer

3 Measured spectrum

There is also the EOC-SI-2000H ultra-high-speed fiber spectrometer, whose spectral output frame rate can reach 1000fps. In addition, multiple functions are flexible and can be set up.

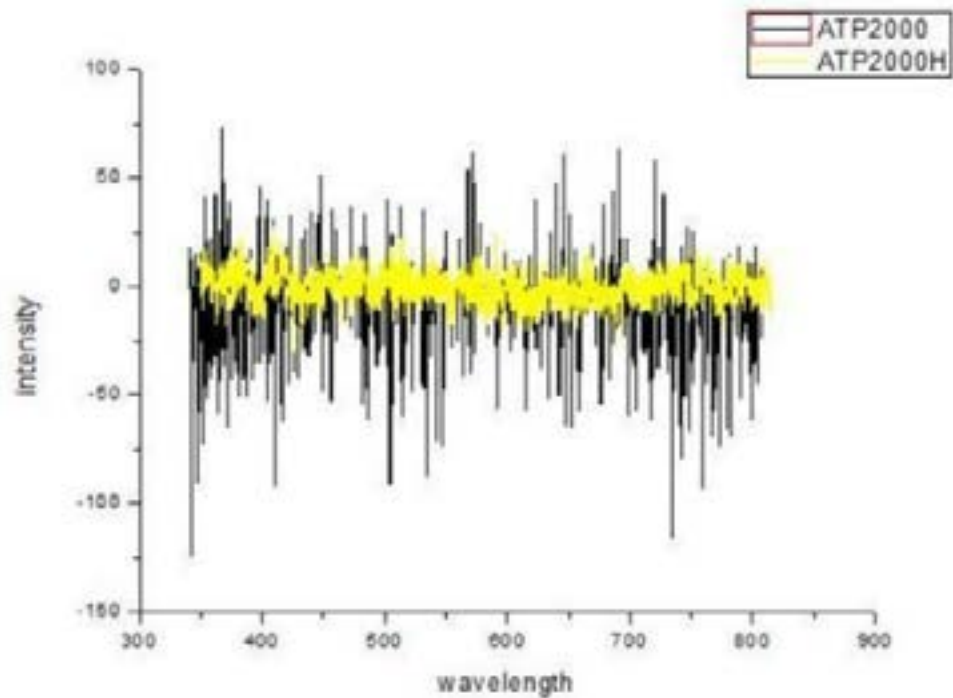

EOC-SI-2000P and EOC-SI-2000H test comparison chart.

4 Electrical Pin-out

Table 1 Electrical Characteristics

| Parameter | Min | Typ | Max | Unit |
|---|------|-----|-----|------|
| Power Supply | | | | |
| Operating voltage range | 4.5 | 5 | 5.5 | V |
| Operating current | | 170 | | mA |
| Logic Inputs(3.3V LVTTL, Five-volt tolerant) | | | | |
| High level input voltage | 1.7 | | 3.6 | V |
| Low level input voltage | -0.3 | | 1.0 | V |
| Logic Output(3.3V LVTTL) | | | | |
| High level output voltage | 2.4 | | | V |
| Low level output voltage | | | 0.4 | V |

The module is equipped with a 20-pin male angled box header(2x10, 2.00 mm pitch) and USB2.0 B type interface. The 20-pin connector is a Samtec part # STMM- 110-02-L-D-RA connector. The mate to this is a Samtec part # TCSD- 10-D-XX.XX-01-N.

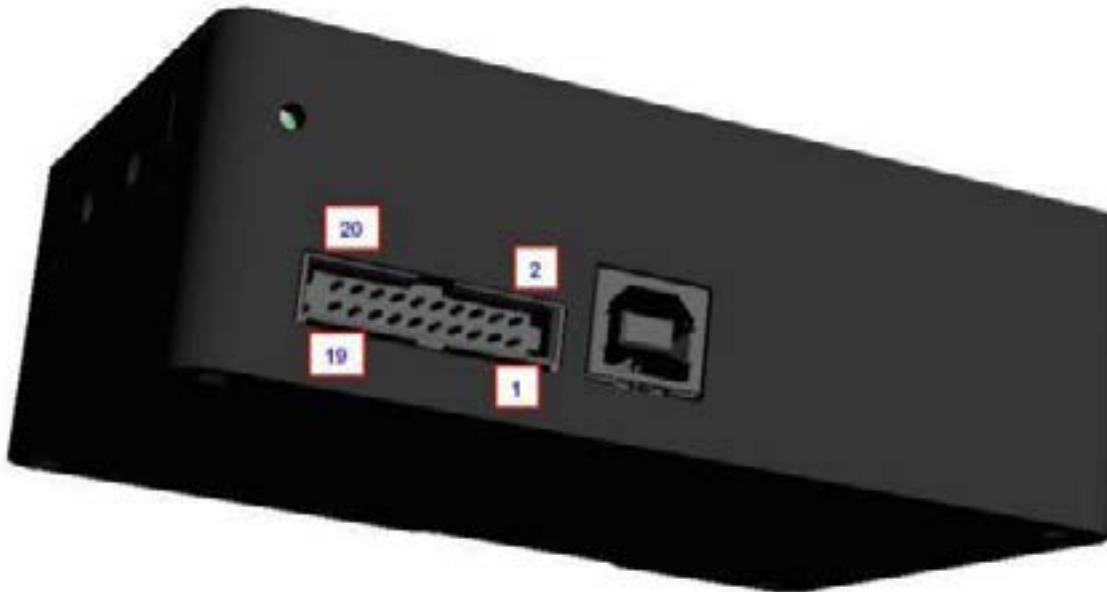


Table 2 Electrical Pin-Out

| Pin # | Description | I/O | Function Description |
|-------|-------------------|---------------|---|
| 1 | VCC | / | Power Supply, $5V \pm 0.5$, |
| 2 | GND | / | Ground |
| 3 | RS232_TX | Output | RS232 Transmit signal |
| 4 | RS232_RX | Input | RS232 Receive signal |
| 5 | Lamp_En | Output | LVTTL output the lamp enable signal. |
| 6 | Continuous_strobe | Output | LVTTL output the continues strobe signal. |
| 7 | Ext_trigger_in | Input | LVTTL input the trigger signal. |
| 8 | Single_strobe | Output | LVTTL output the single strobe signal. |
| 9 | SPI_SCK | Output | The SPI Clock signal for communications to other SPI peripherals |
| 10 | SPI_MOSI | Output | The SPI Master Out Slave In (MOSI) signal for communications to other SPI peripherals |
| 11 | SPI_MISO | Input | The SPI Master In Slave Out (MISO) signal for communications to other SPI peripherals |
| 12 | SPI_CS | Output | The SPI Chip/Device Select signal for communications to other SPI peripherals |
| 13 | GPIO0 | Input /Output | General Purpose Software Programmable Digital Inputs/Outputs, LVTTL Logic. |
| 14 | GPIO1 | Input /Output | General Purpose Software Programmable Digital Inputs/Outputs, LVTTL Logic. |
| 15 | GPIO2 | Input /Output | General Purpose Software Programmable Digital Inputs/Outputs, LVTTL Logic. |
| 16 | GPIO3 | Input /Output | General Purpose Software Programmable Digital Inputs/Outputs, LVTTL Logic. |
| 17 | GPIO4 | Input /Output | General Purpose Software Programmable Digital Inputs/Outputs, LVTTL Logic. |
| 18 | GPIO5 | Input /Output | General Purpose Software Programmable Digital Inputs/Outputs, LVTTL Logic. |
| 19 | GPIO6 | Input /Output | General Purpose Software Programmable Digital Inputs/Outputs, LVTTL Logic. |
| 20 | GPIO7 | Input /Output | General Purpose Software Programmable Digital Inputs/Outputs, LVTTL Logic. |

5 Order Guide

Order number Rules:

| Model | Spectral region | | Slit width | |
|----------|------------------|-----------------|------------|--|
| ATP2000P | Short wavelength | Long wavelength | Slit width | |

For example:

What to buy ATP2000P, spectral region: 200-850nm, slit width is 50 μ m, then the order no is:

ATP2000P-200-850-050

| Order No | Spectral region | Slit | |
|---------------------------|-----------------|------------|--|
| EOC-SI-2000P-200-400-### | 200~400 | 10 μ m | |
| EOC-SI-2000P-200-850-### | 200~850 | 25 μ m | |
| EOC-SI-2000P-200-1100-### | 200~1000 | 50 μ m | |

| | | | |
|-----------------------|----------|-------------------------|--|
| ATP2000P-340-850-### | 340~850 | 100 μ m | |
| ATP2000P-600-1100-### | 600~1100 | 200 μ m | |
| ATP2000P-###-###-### | Other | Other: _____ μ m | |

6 Derivation

| PN | Description |
|----------|------------------------------|
| ATP2000 | Basic type |
| ATP2000P | The high performance version |
| ATP2000H | High speed to 1Kpfs |

7. Company Profile

Electro Optical Components is a first-class spectroscopy solution provider

The products are based on unique technologies of Optomechatronics, Spectroscopy Analysis, Process Weak Optical and Electrical Signals, Cloud Computing, and have been developed wide products line of the competitive Raman spectroscopy instruments, micro spectrometer, hyperspectral imager, field spectroradiometer, fluorescence spectroscopy, LIBS etc. Driven by advanced technologies and products, Optosky brand has been well-known to customers all over the world.

The manufacturer is based on technology innovation, market-driven direction, customer first, provides first-class products and services, and one-stop solutions to many fortune 500 companies in many industries. The manufacturer received praise from different industry companies, as well as many innovative intellectual properties, software copyright, qualification certification, and winner awards over hundred numbers.

The manufacturer is currently conducting the exclusive project of major industrialization national oceanic administration.

The manufacturer has over 70 IPs and over 20 innovative patents.

The manufacturer received ISO9001:2015 certification, CE certification, Police Administration Certification, FDA approval compliant, IQOQPQ compliant.