



Product Data Sheet

NDIR CO2 SENSOR MODEL EOC-GDM-CO2-IRM300

• Description

IRM300 is a general infrared CO2 sensor module formed using the NDIR infrared absorption detection principle.

• Performance Characteristics

Output Mode:	UART,PWM,IIC
No. of Channel:	Dual
Dimension:	57 mm X 35 mm X 16 mm
Application:	HVAC, Air Quality

• Environmental




Storage Temperature:	-40°C ~ 70°C
Working Temperature:	0°C ~ 50°C
Working Humidity:	0% ~ 95%RH non-condensing

• Interface

Pin A - TX(UART)	Pin 1 - VCC
Pin B - RX(UART)	Pin 2 - GND
Pin C - VCC	Pin 3 - GND

• Installation Instructions

• Product Dimensions

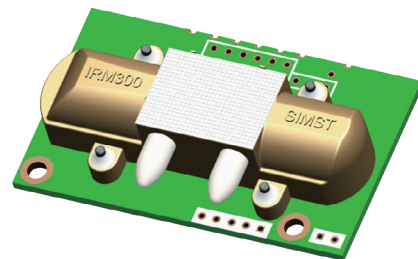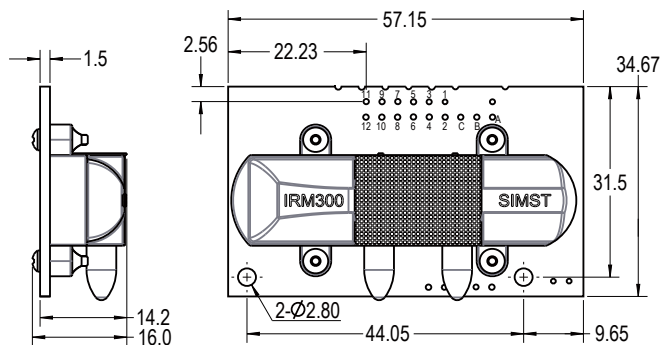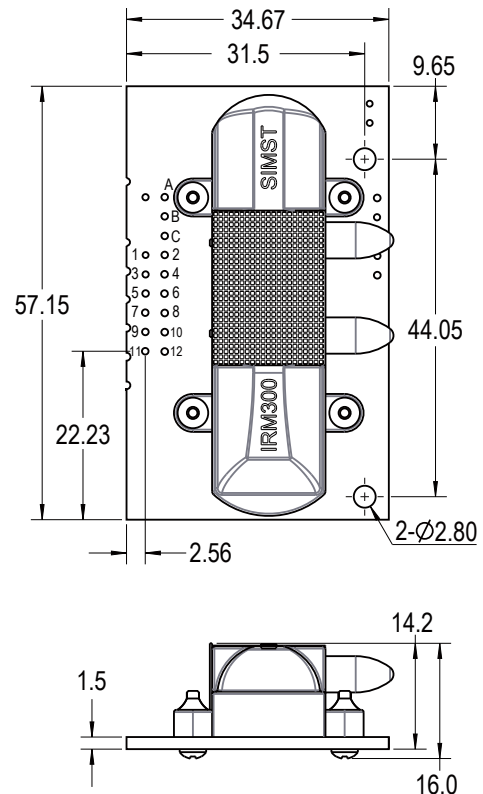

All dimensions in mm

All tolerances ± 0.20 mm unless otherwise stated

• Note

All the above performance parameters are measured in a standard test environment. Please contact us if you need more details.

Product Data Sheet

NDIR CO2 SENSOR MODEL EOC-GDM-CO2-IRM300


• Technical Data

Description	Parameter	Unit
Detection Range	0~50000	ppm
Detection Accuracy	±50ppm ± 5% reading	/
Response Time T90	diffusing: 60	seconds
	pumping: 10	seconds
Preheat Time	T _{warm} : 120	seconds
Working Voltage	5 ± 0.5	V
Working Current	I _{max} : 130	mA

• PWM Output

Cycle: 1000.2ms ± 5%

$$C_{ppm} = 10000 \times (TH - 0.1ms) / (TH + TL - 0.2ms)$$

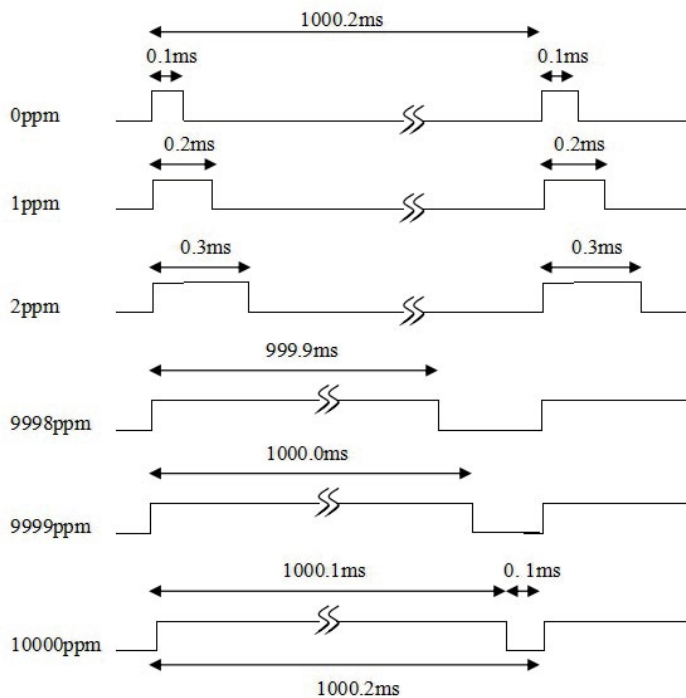

• UART Protocol

Baud Rate: 19200 bps, 8 data bits, 1 stop bit, no check bit. The concentration readout and return data are in hexadecimal.

Concentration uploaded automatically in ASCII with the format:

32	32	x	x	x	x	x	32	p	p	m	\r	\n
----	----	---	---	---	---	---	----	---	---	---	----	----

For example: output of 12345 ppm:

		1	2	3	4	5		p	p	m	\r	\n
0x20,	0x20,	0x31,	0x32,	0x33,	0x34,	0x35,	0x20,	0x70,	0x70,	0x6d,	0x0d,	0x0a,