




Electro Optical Components, Inc.

5460 Skylane Boulevard, Santa Rosa, CA 95403

Toll Free: 855-EOC-6300

www.eoc-inc.com | info@eoc-inc.com

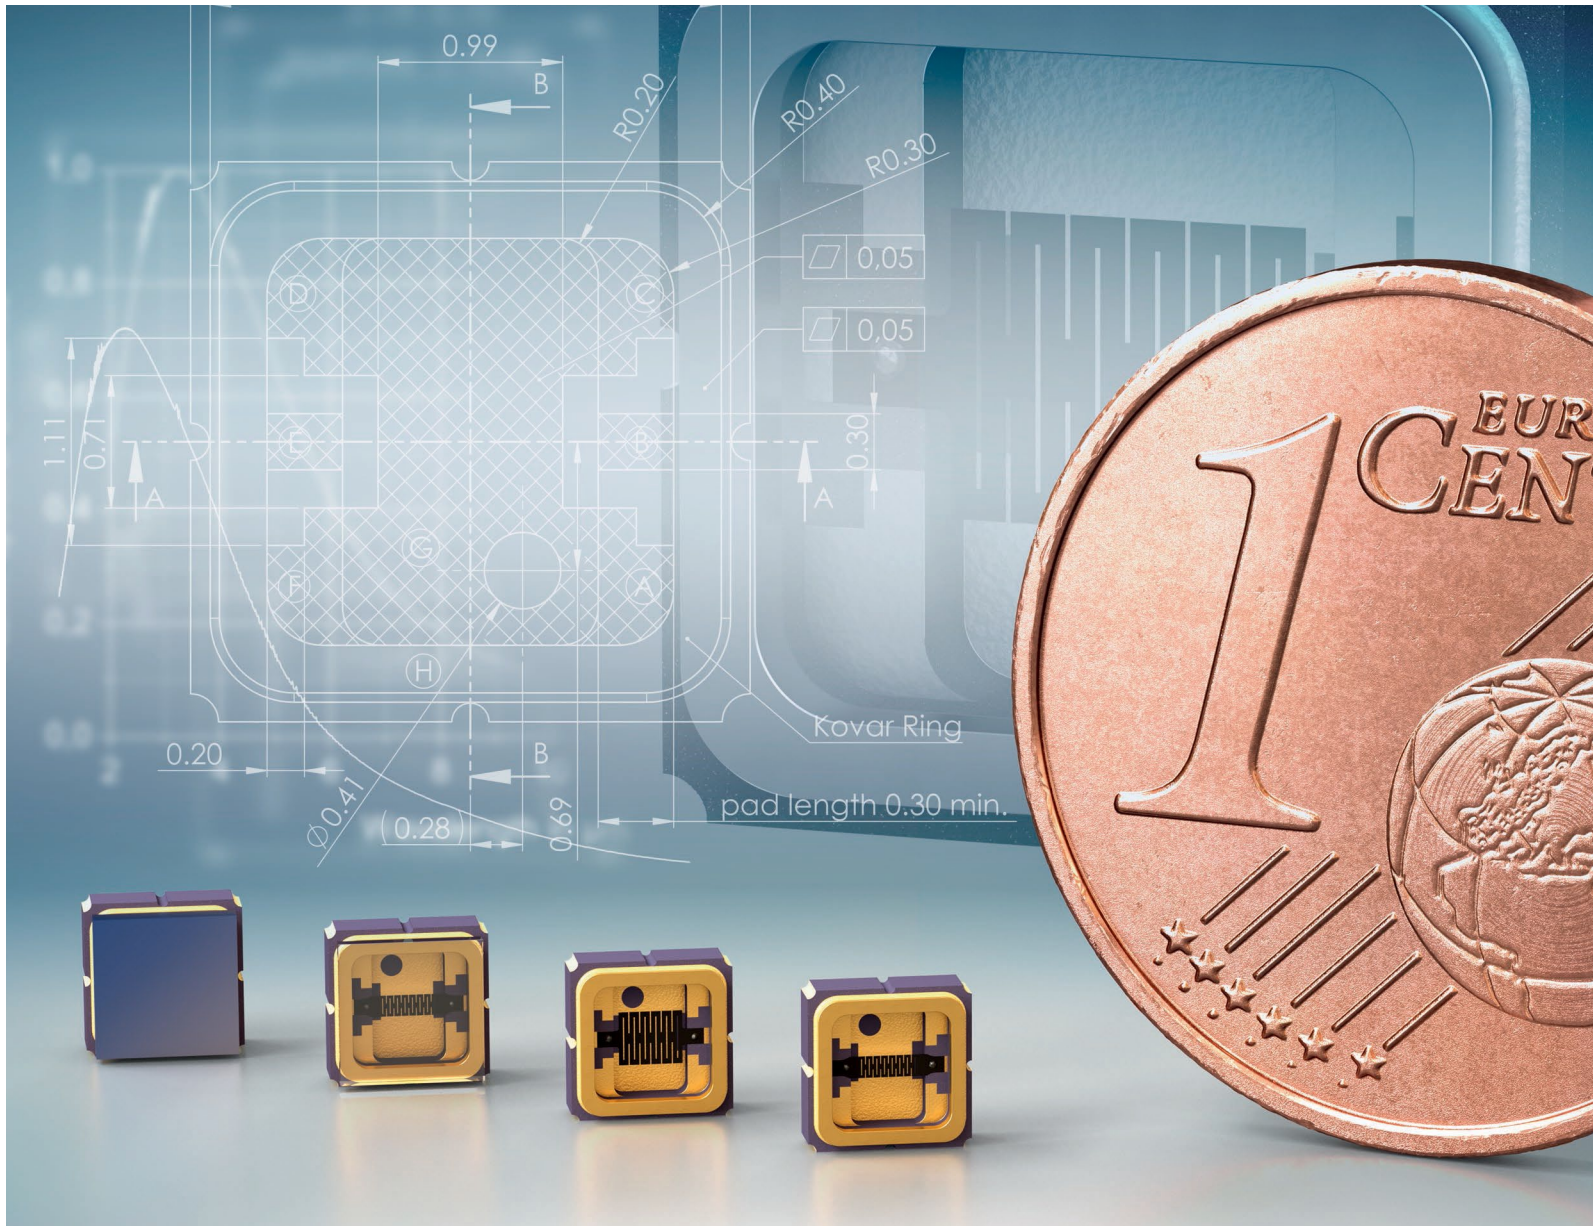

Data Sheet

EOC-IRE-smd series

Thermal Infrared Emitters

EOC-IRE-smd series


Thermal Infrared Emitters

EOC-IRE-smd series emitters are small, powerful infrared radiation sources that meet the demands for reliable miniaturized gas sensors and offer a wide range of new application scenarios. The low energy consumption, the high efficiency and the small size allow the use in portable, battery-powered, and mobile applications. These innovative infrared light sources are used, for instance, in respiratory gas analysis, e.g. for the detection of CO₂ and breath alcohol, and in Smart Home and Smartphone applications.


The pioneering SMD package enables a fully automated production in high-volume markets.

EOC's infrared radiation sources are pulsable thermal emitters with a near black-body emittance. Based on a patented nanotechnology and a patented emitter set-up made of a high-melting metal, the free-standing monolithic radiating element and the nanostructured emitter surface offer numerous advantages in many applications.


Key features



Very small size



High efficiency



High radiant power

- ✓ Pulsable thermal black-body infrared source mounted in a SMD package with a size of 3 x 3 mm.
- ✓ Patented nanostructured radiating element achieves up to 500% more detection signal!
- ✓ Innovative surface technology for customized SMD products.
- ✓ Wide wavelength range enables applications in mobile, portable devices and various wearables, for miniaturized gas measurement sensors and hand-held spectrometers.

*innovative infrared sources for
gas detection & spectroscopy*



Main specifications

Parameter	EOC-IRE-20smd	EOC-IRE-100smd
Package	SMD3	SMD3
Radiating element area	0.24 mm ²	1 mm ²
Radiating element emissivity	> 0.9	> 0.9
Radiating element temperature	700 °C at 175 mW	600 °C at 290 mW
Optical output power**	up to 20 mW	up to 50 mW
Max. electrical power (DC)	175 mW	290 mW
Max. electrical voltage	1.25 V	1.7 V
Max. electrical current	140 mA	170 mA
Electrical resistance	8...9 Ω	9...10 Ω
Modulation frequency*	15 Hz	11 Hz
Filter (soldered window)	Si-ARC, Sapphire, ZnSe	Si-ARC, Sapphire, ZnSe
Wavelength range**	2 to 16 μm	2 to 16 μm


* 50 % modulation depth, square wave signal, 50 % duty cycle

** depending on filter transmissivity


Optical specifications

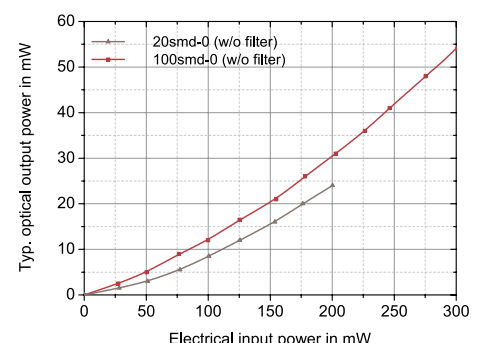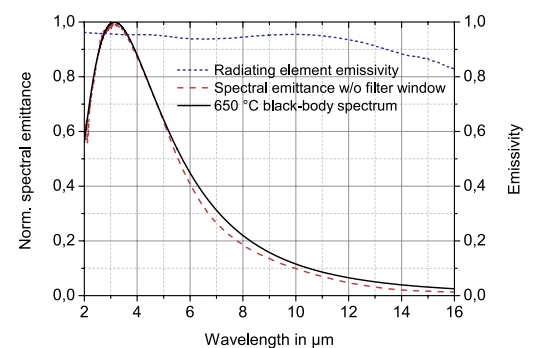


Radiating element temperature

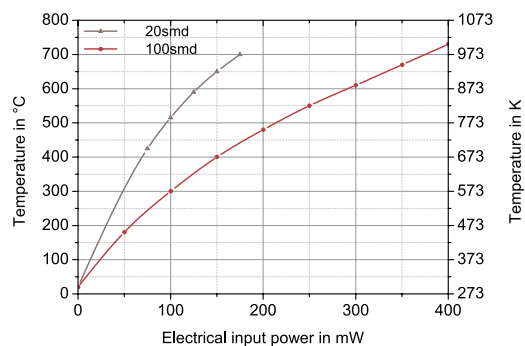


Electrical specifications

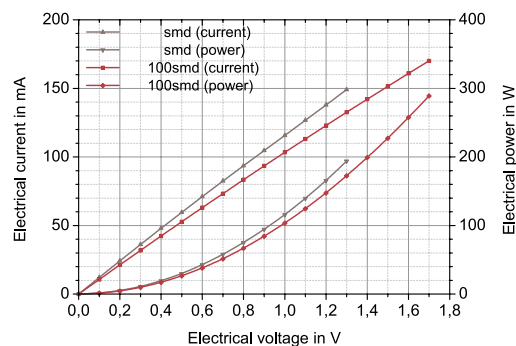




Modulation depth

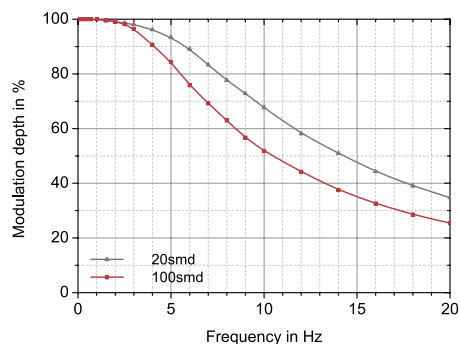

Window material transmissivity

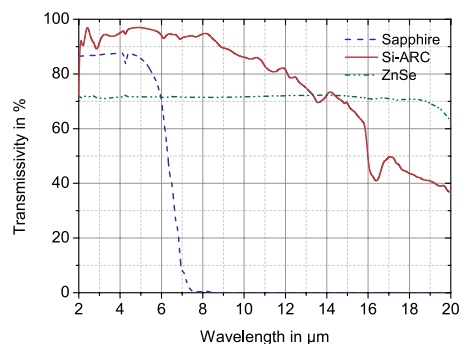

EOC-IRE-20smd	EOC-IRE-100smd	Window options
		
Without window	Without window	Si-ARC, Sapphire, ZnSe
